


KVS coupling for Yanmar engines



Before use, carefully read the GENERAL INSTRUCTIONS FOR USE OF COUPLING SYSTEMS

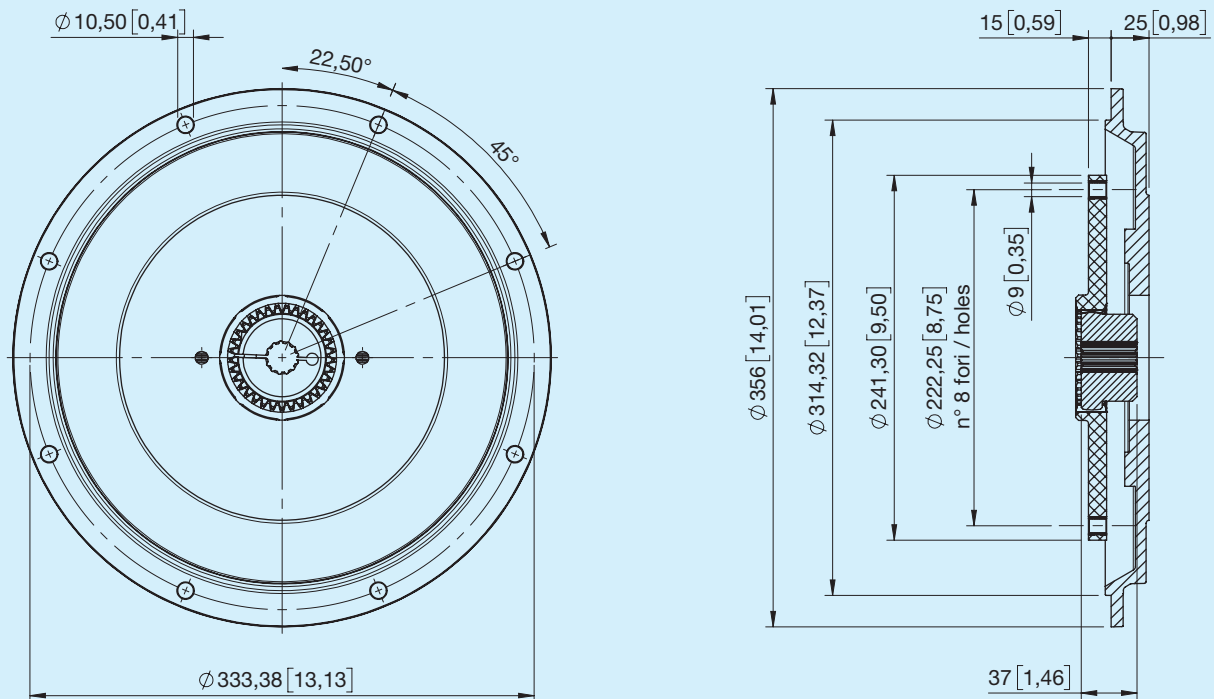

Coupling

Weight Kg	Flange J Kgm ²	Teeth	Weight Kg	Hub J Kgm ²	Technical data			
					Nom. torque Nm	Max. torque Nm	Max rpm Min ⁻¹	Tors. rigidity (Nm/rad)x103
0.5	0.0039	33	0.7	0.0004	300	600	5000	21 @ 0.66Tkn

Code	Pump centring	Pump shaft
HMFCAA002ABG	SAE A 2 M10 holes	Z.9 16/32
HMFCAA002ADE	SAE A 2 M10 holes	Z.11 16/32
HMFCAA002AFB	SAE A 2 M10 holes	Z.13 16/32
HMFCAA002AHC	SAE A 2 M10 holes	Z.15 16/32
HMFCNG002AOA	GR. 2 – GR. 3	GR. 2
HMFCNG002AOG	GR. 2 – GR. 3	GR. 3
HMFCB002ABG	SAE B 2 M14 holes	Z.9 16/32
HMFCB002ADE	SAE B 2 M14 holes	Z.11 16/32