

Transmittable nominal torque 670 Nm



Before using the coupling system, carefully read the document entitled GENERAL INSTRUCTIONS FOR COUPLING SYSTEM USE.

ABA SAE 3 B - 2 M14 holes



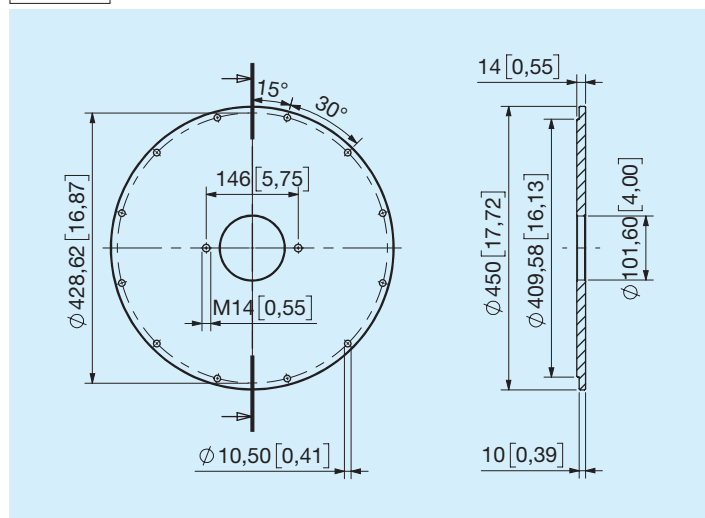



ABB SAE 3 B - 4 M14 holes

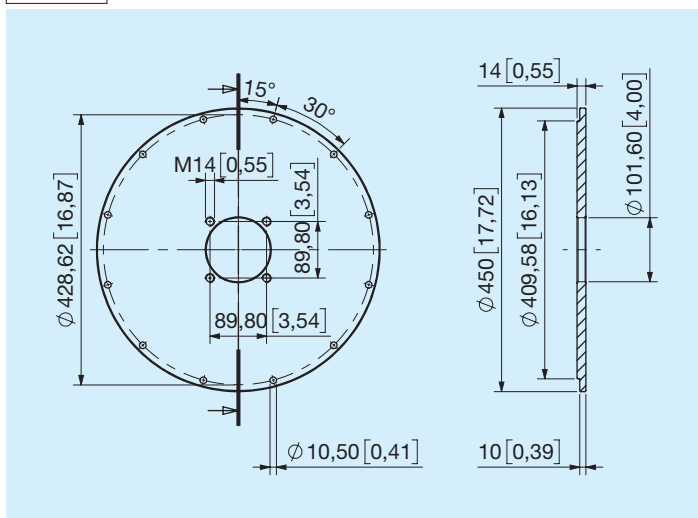


ABC SAE 3 B - 2 M12 holes

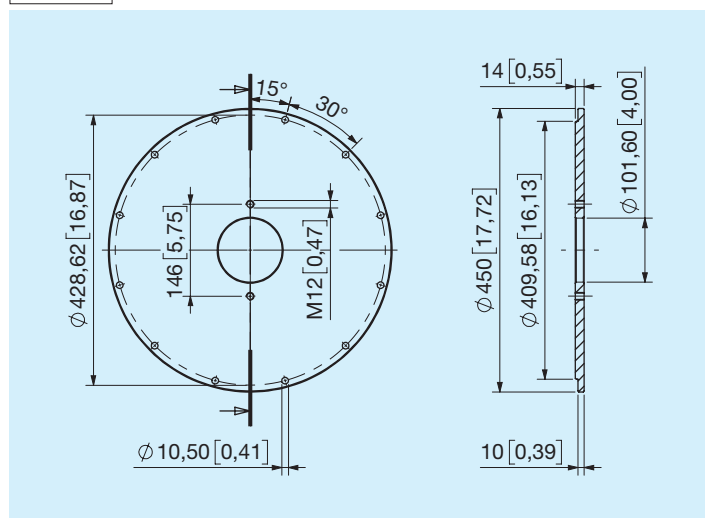


ACA SAE 4 B - 2 M14 holes

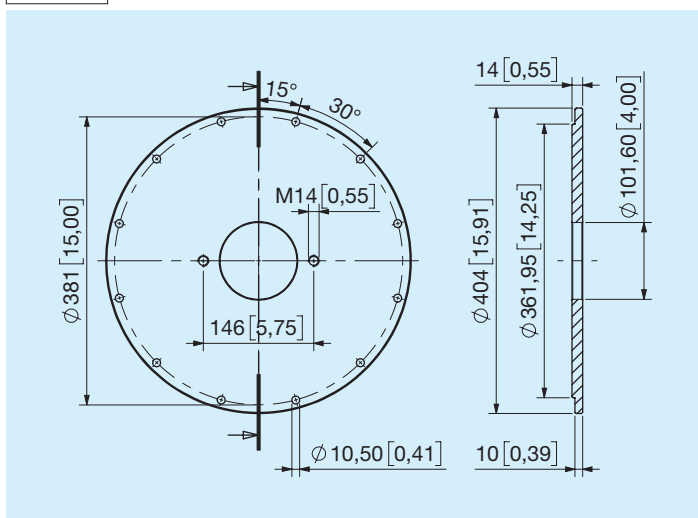


ACB SAE 4 B - 4 M14 holes

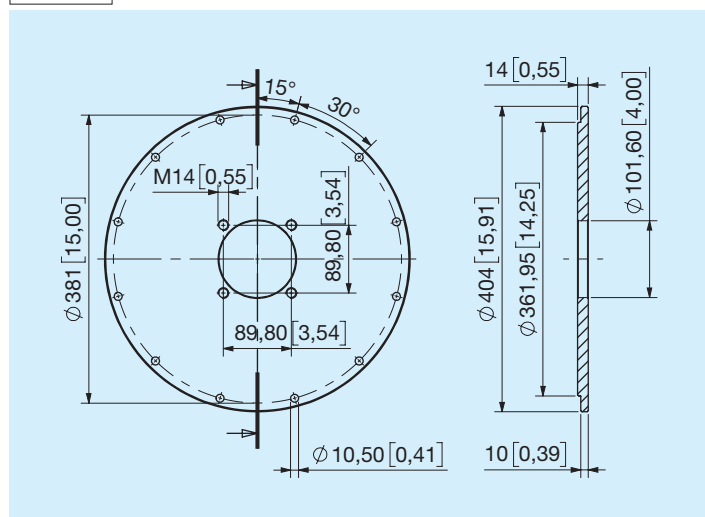


ADA SAE 5 B - 2 M14 holes

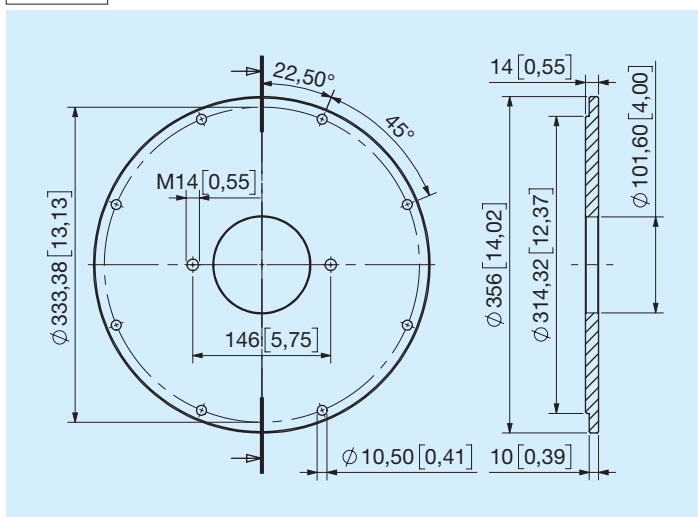


ADB SAE 5 B - 4 M14 holes

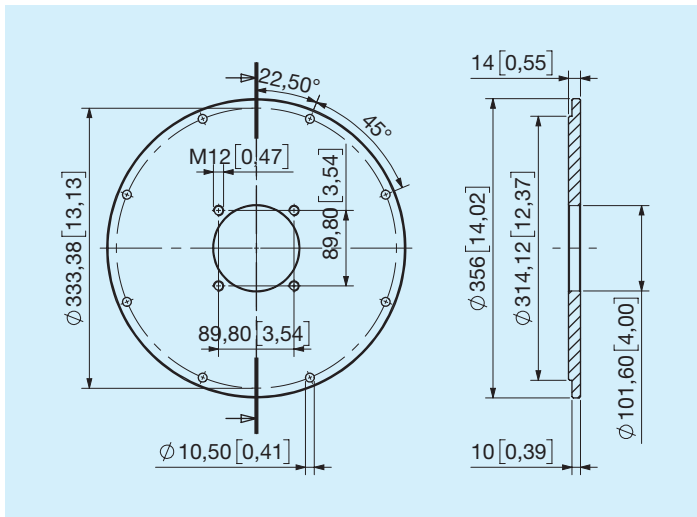


ADC SAE 5 B - 2 M12 holes

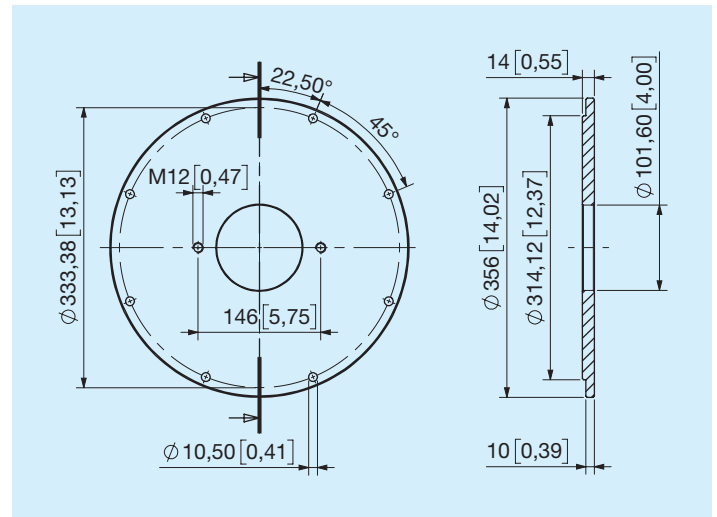


AEA SAE 6 B - 2 M14 holes

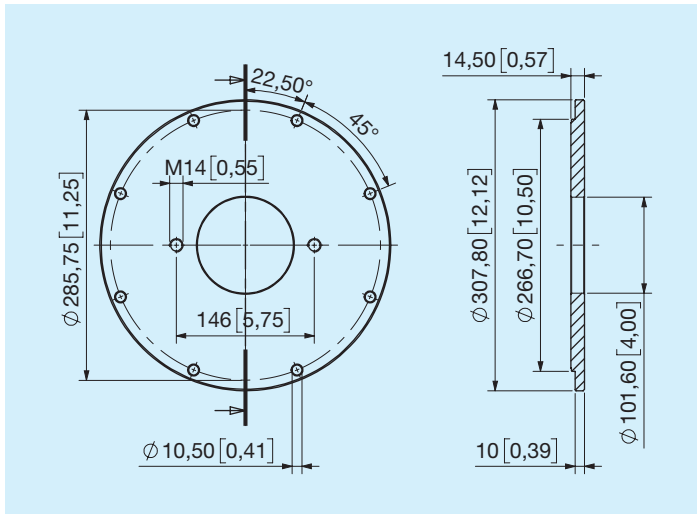


AGA SAE 3 C - 4 M14 holes

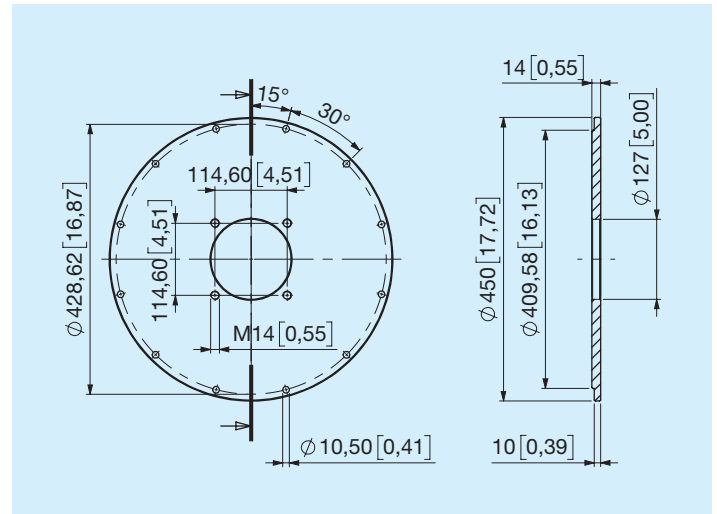


AGD SAE 3 C - 2 M16 holes

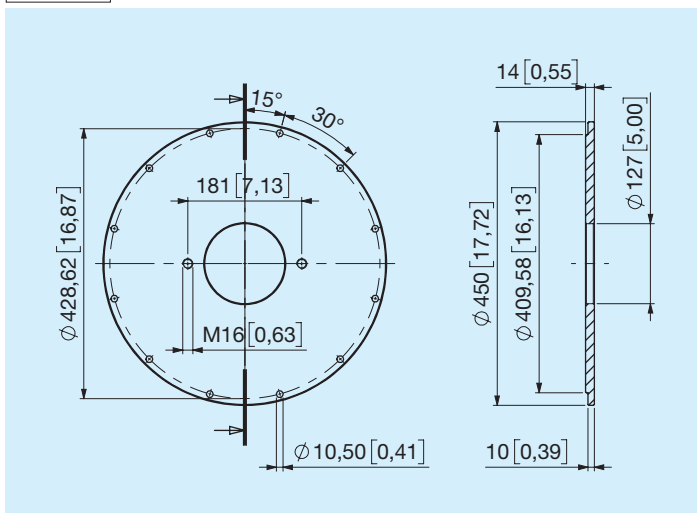


AHA SAE 4 C - M14 holes

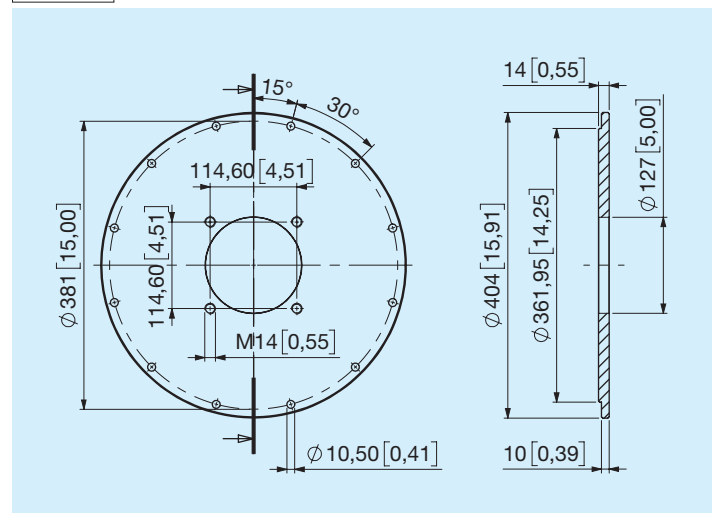


AHD SAE 4 C - 2 M16 holes

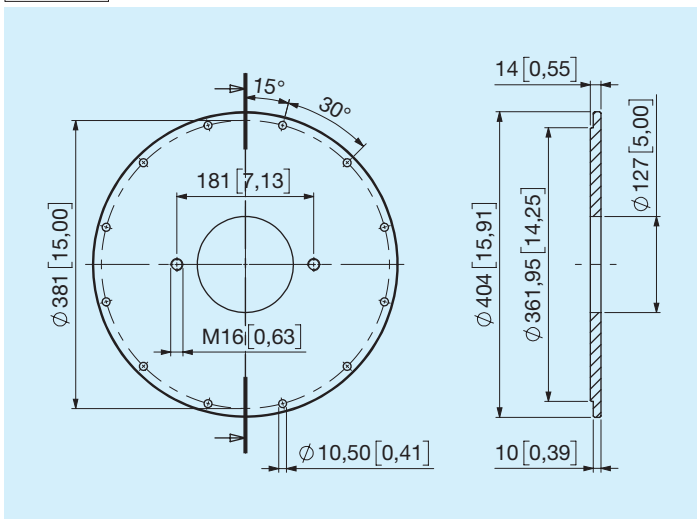


ALA SAE 5 C - 4 M14 holes

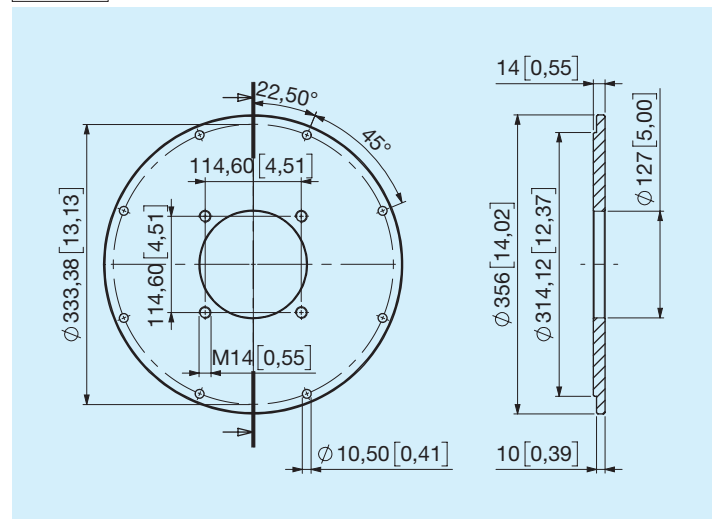


ALC SAE 5 C - 2 M16 holes

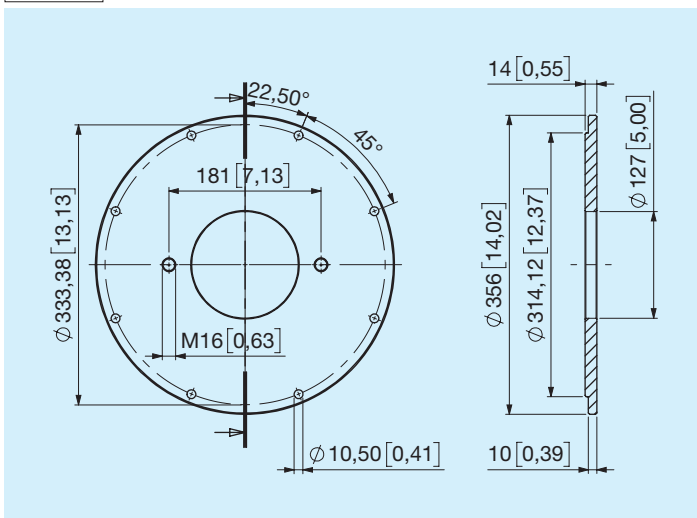


ARG SAE 3 GR. 3

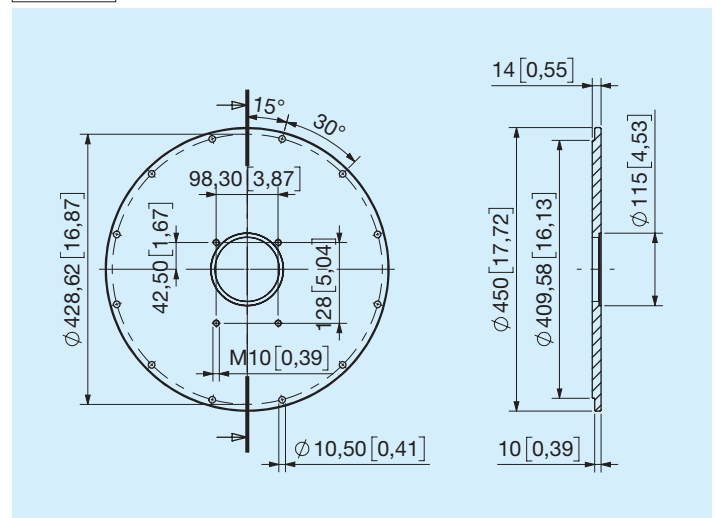


ASG SAE 4 GR. 3

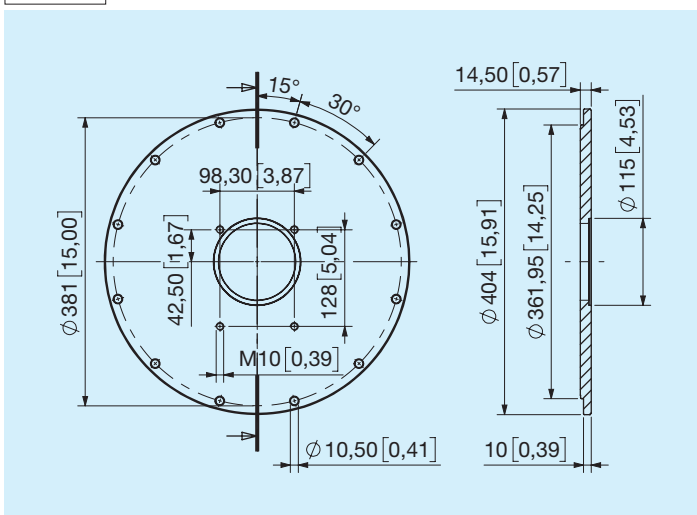


ATC SAE 5 GR. 3

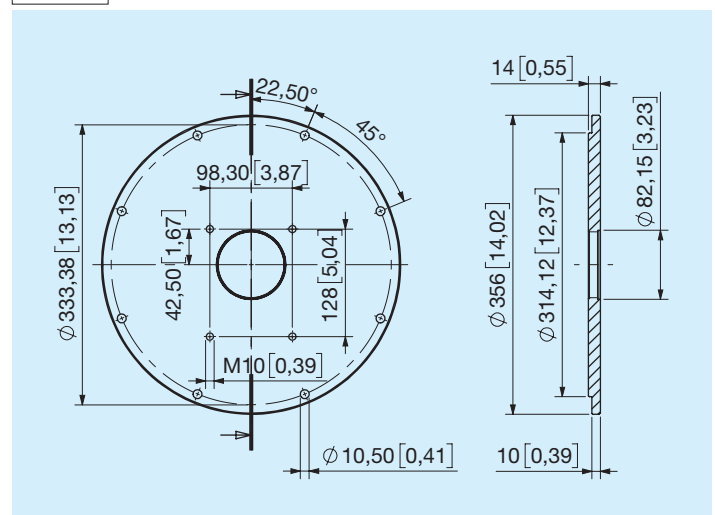

003 6" 1/2 flange

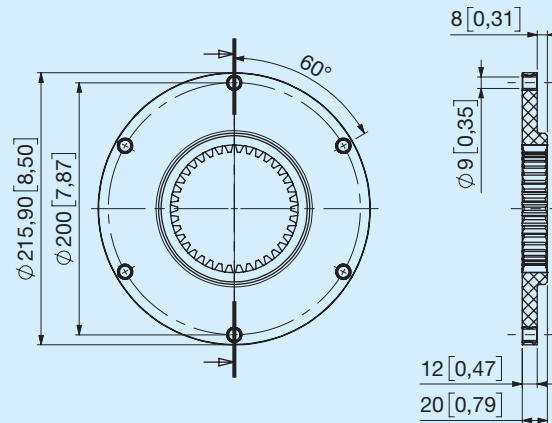


Flange hubs 003

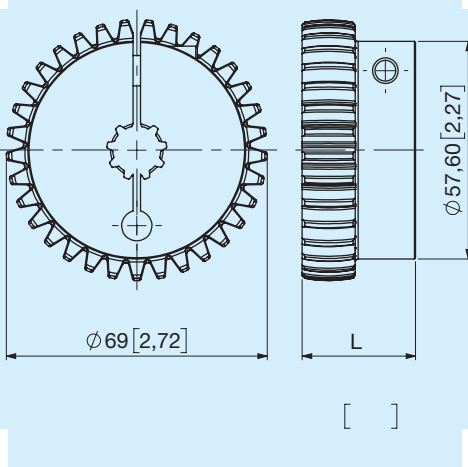


Code	Pump shaft	Teeth	L mm	Weight kg	i kgm ²	Screw	Torque Nm
CAC	Z.13 16/32	38	37	1,3	0,0023	M8	25
CBM	Z.14 12/24	38	37	1,2	0,0023	M8	25
CBE	W30x2x14	38	37	1,2	0,0023	M8	25
CDD	Z.15 16/32	38	37	1,3	0,0023	M8	25
CEF	W35x2x16	38	37	1,2	0,0023	M8	25
CPC	GR. 3	38	37	1,3	0,0023		

004 7" 1/2 flange

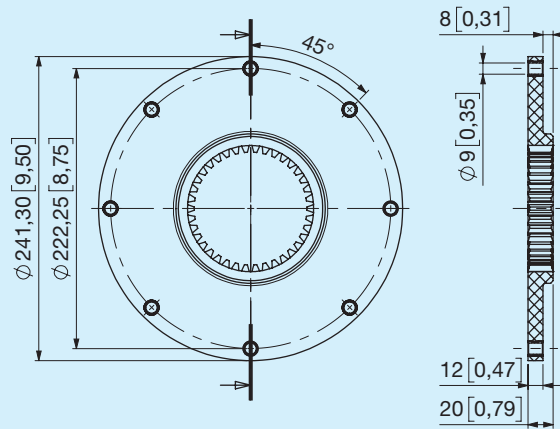


Flange hubs 004

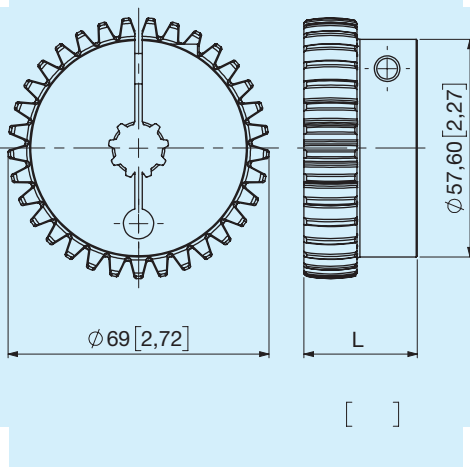


Code	Pump shaft	Teeth	L mm	Weight kg	i kgm ²	Screw	Torque Nm
CAC	Z.13 16/32	38	37	1,3	0,0023	M8	25
CBM	Z.14 12/24	38	37	1,2	0,0023	M8	25
CBE	W30x2x14	38	37	1,2	0,0023	M8	25
CDD	Z.15 16/32	38	37	1,3	0,0023	M8	25
CEF	W35x2x16	38	37	1,2	0,0023	M8	25
CPC	GR. 3	38	37	1,3	0,0023		

005 8' flange

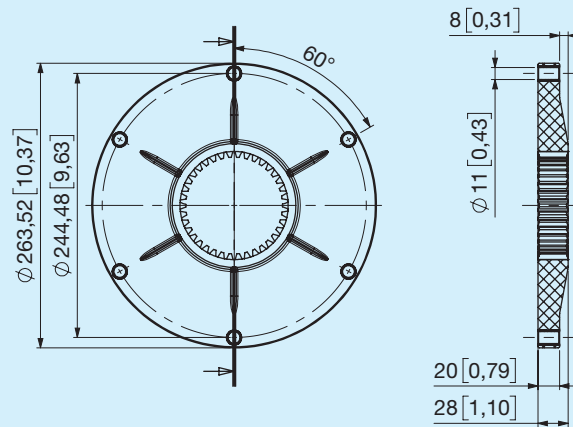


Flange hubs 005

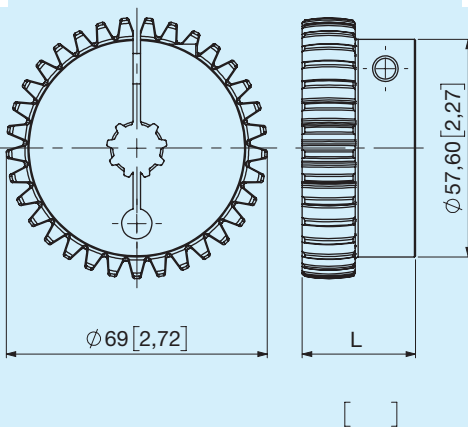


Code	Pump shaft	Teeth	L mm	Weight kg	i kgm ²	Screw	Torque Nm
CAE	Z.13 16/32	38	60	2,1	0,0023	M10	49
CBH	Z.14 12/24	38	60	2	0,0023	M10	49
CBA	W30x2x14	38	60	2	0,0023	M10	49
CDB	Z.15 16/32	38	60	2,1	0,0023	M10	49
CEC	W35x2x16	38	60	2	0,0023	M10	49
CIG	Z.21 16/32	38	60	1,9	0,0023	M10	49
CMC	Z.23 16/32	38	60	1,9	0,0023	M10	49

006 10' flange

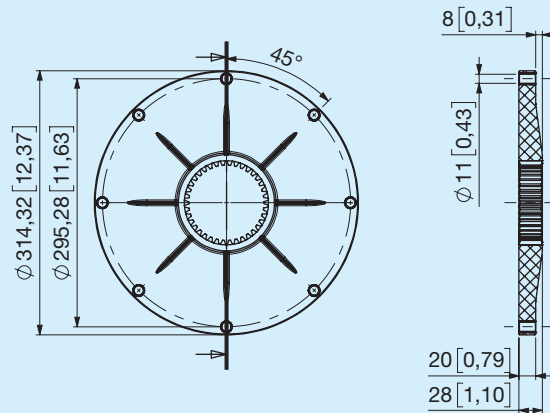

Flange hubs 006

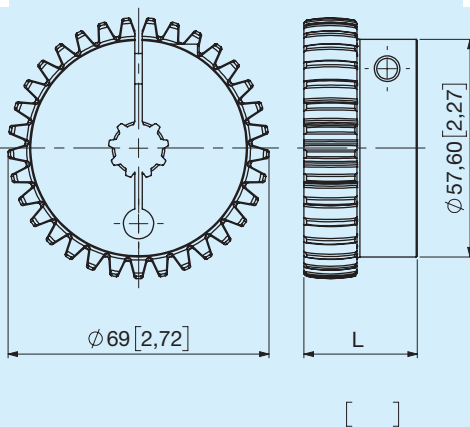

Code	Pump shaft	Teeth	L mm	Weight kg	i kgm ²	Screw	Torque Nm
CAA	Z.13 16/32	38	50	1,8	0,0023	M10	49
CBB	Z.14 12/24	38	50	1,7	0,0023	M10	49
CBC	W30x2x14	38	50	1,7	0,0023	M10	49
CDA	Z.15 16/32	38	50	1,7	0,0023	M10	49
CEA	W35x2x16	38	50	1,6	0,0023	M10	49
CIE	Z.21 16/32	38	50	1,6	0,0023	M10	49
CMA	Z.23 16/32	38	50	1,5	0,0023	M10	49
CPA	GR. 3	38	50	1,6	0,0023		

123			456			789		
KVS 670 Nm								
Bell housings								
123			ADA SAE 5 B - 2 M14 holes			AGD SAE 3 C - 2 M16 holes		
ABB SAE 3 B - 4 M14 holes			ADB SAE 5 B - 4 M14 holes			AHA SAE 4 C - M14 holes		
ABC SAE 3 B - 2 M12 holes			ADC SAE 5 B - 2 M12 holes			AHD SAE 4 C - 2 M16 holes		
ACA SAE 4 B - 2 M14 holes			AEA SAE 6 B - 2 M14 holes			ALA SAE 5 C - 4 M14 holes		
ACB SAE 4 B - 4 M14 holes			AGA SAE 3 C - 4 M14 holes			ALC SAE 5 C - 2 M16 holes		
Flanges								
456			005 8"			008 11" 1/2		
003 6" 1/2			006 10"					
004 7" 1/2								
Hubs								
789			CBE W30x2x14 L=37			CEG W35x2x16 L=45		
CAC Z.13 16/32 L=37			CBC W30x2x14 L=50			CEA W35x2x16 L=50		
CAA Z.13 16/32 L=50			CBA W30x2x14 L=60			CEC W35x2x16 L=60		
CAE Z.13 16/32 L=60			CDD Z.15 16/32 L=37			CIF Z.21 16/32 L=45		
CBM Z.14 12/24 L=37			CDA Z.15 16/32 L=50			CIE Z.21 16/32 L=50		
CBG Z.14 12/24 L=45			CDB Z.15 16/32 L=60			CIG Z.21 16/32 L=60		
CBB Z.14 12/24 L=50			CEF W35x2x16 L=37			CMB Z.23 16/32 L=45		
CBH Z.14 12/24 L=60								
						CMA Z.23 16/32 L=50		
			CMC Z.23 16/32 L=60					
			CPC GR. 3 L=37					
			CPA GR. 3 L=50					