



PI5113 Interface change plate BW05-BW10 with Load sensing signal

Interface IBW0511 - IBW1033

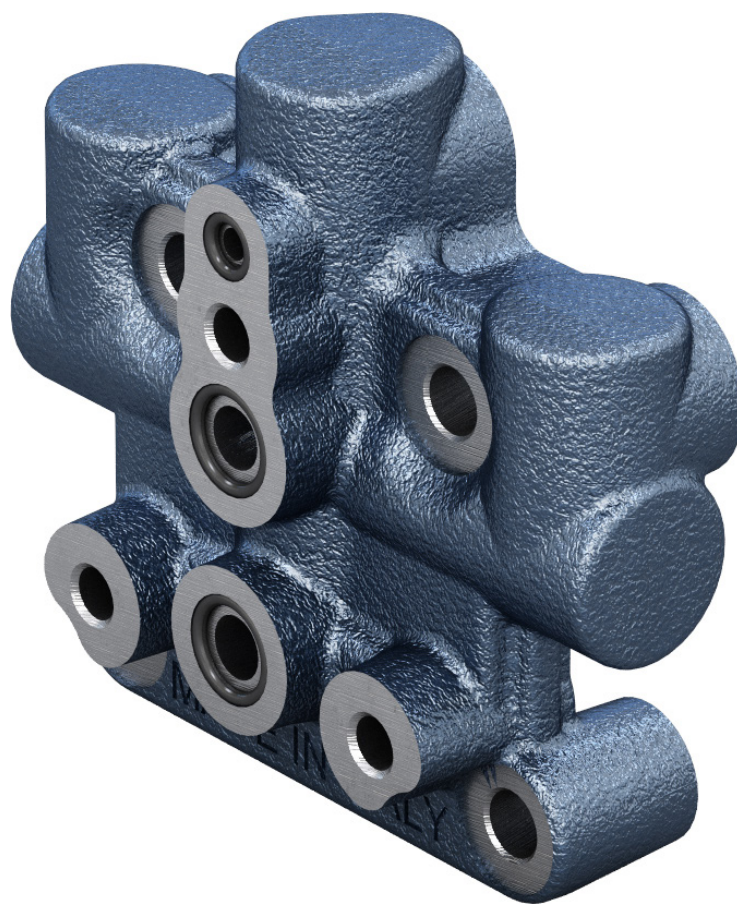


Before use, carefully read the GENERAL INSTRUCTIONS FOR USE OF DIRECTIONAL CONTROL VALVES

Nominal flow	90 l/min 23.78 US gpm
Nominal pressure	300 bar 4351 psi
Maximum tank pressure	50 bar 725 psi
Temperature range	-20°C +85°C NBR seals (max peak +100°C) -20°C + 130°C HNBR seals
Oil viscosity	from 15 mm²/s to 90 mm²/s (15 cSt to 90 cSt)
Fluid	Hydraulic fluids as defined in ISO 6743-4 standard
Weight	1.1 kg 2.2 lb
Interface	IBW0511 - IBW1033

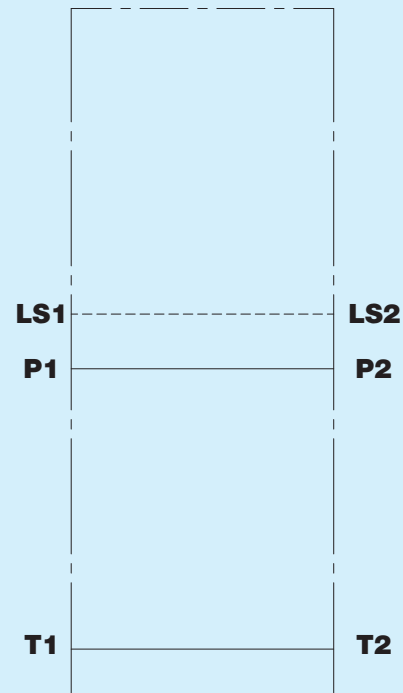

Dimensions

IBW0511

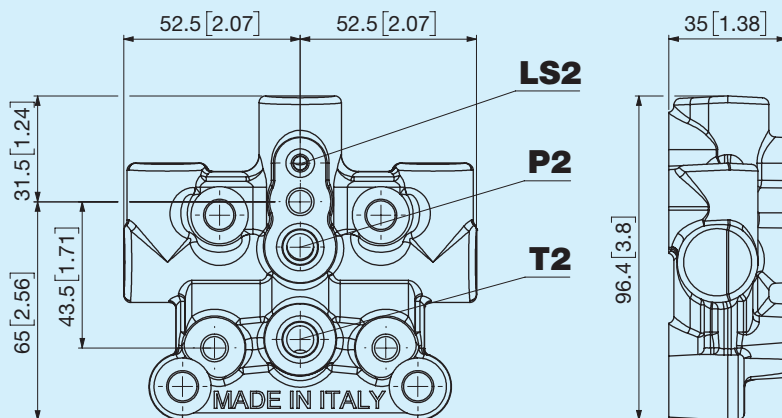

IBW1033

