




HPR 系列 2 电机

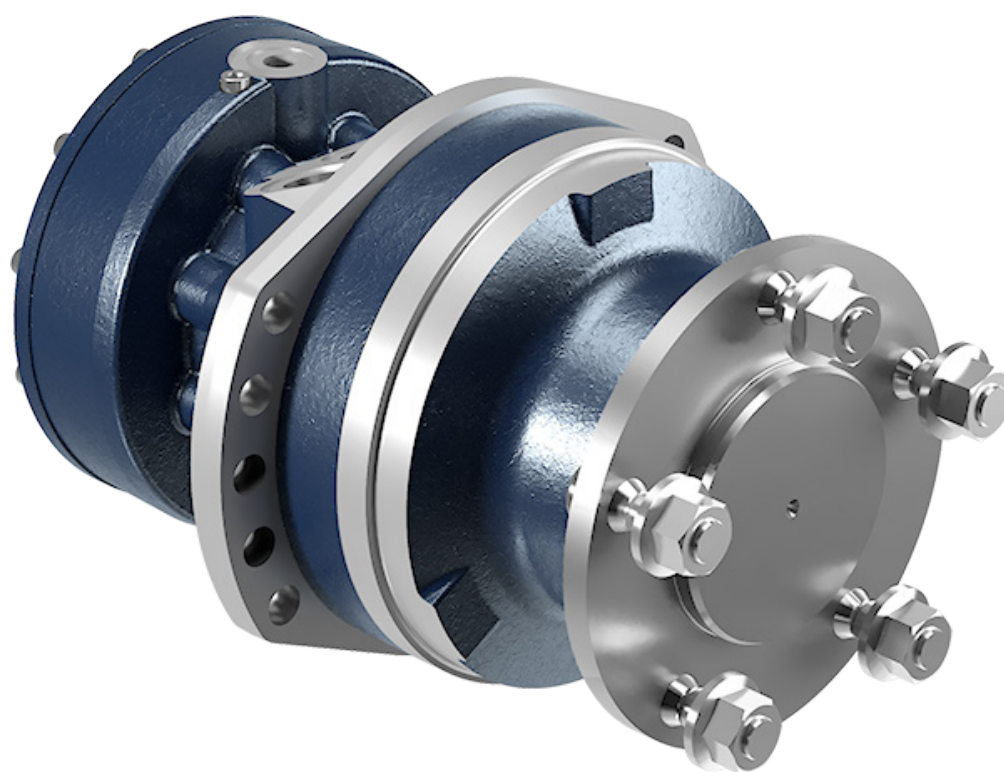

开始使用前，请仔细阅读文件《闭式轴向柱塞泵和电机使用一般说明》。

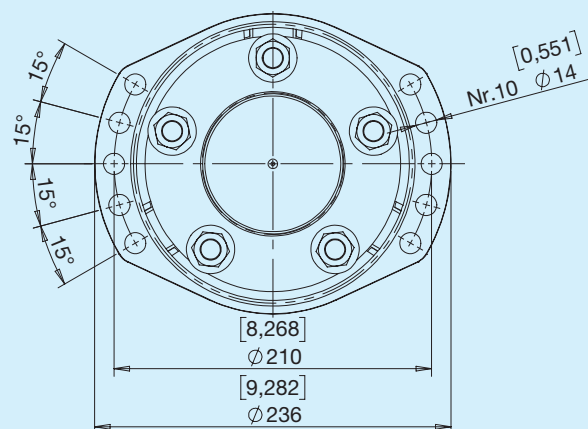



电动轮版本

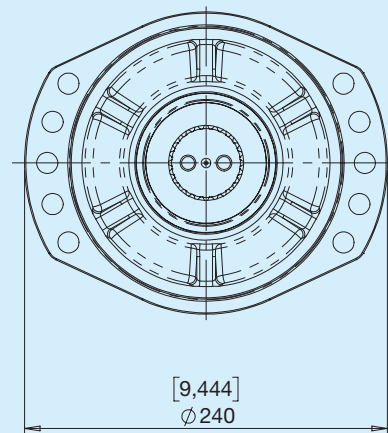



花键轴版本

2



R 后 (轮)

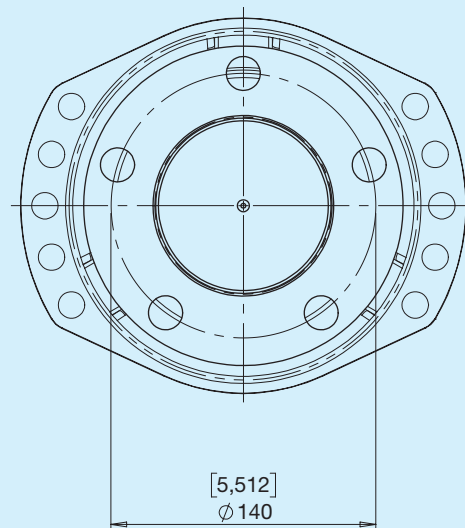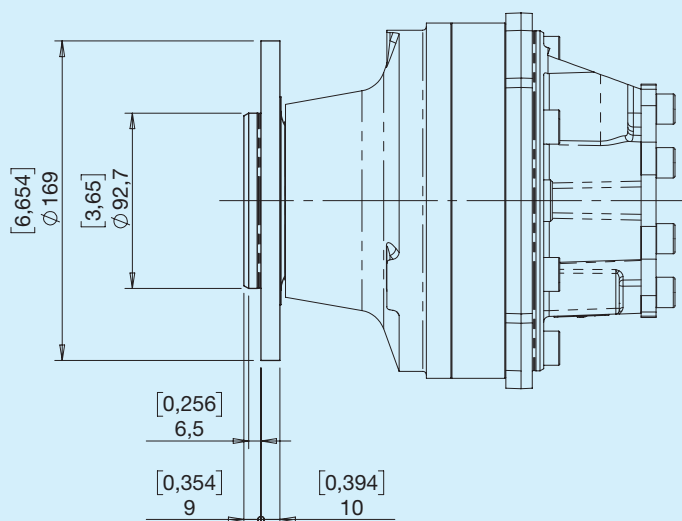



1 后 (带螺钉的轮子)

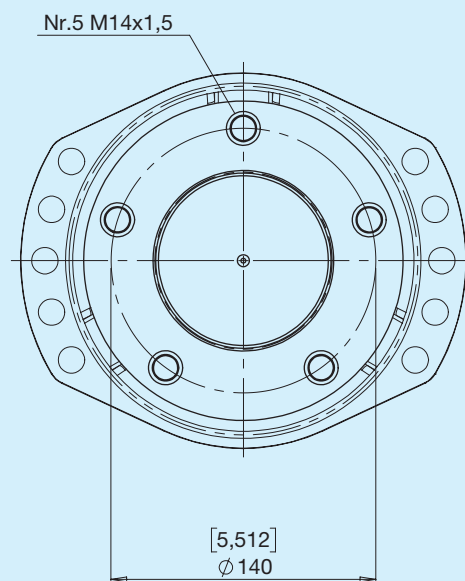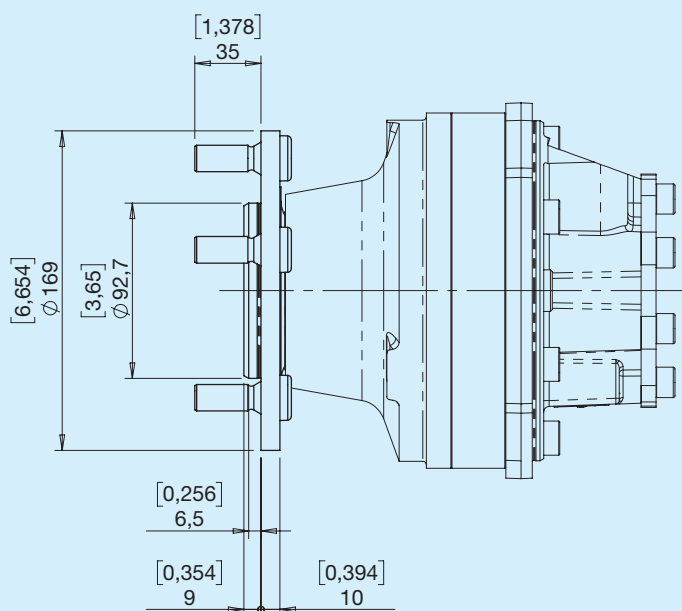

2 后（带螺钉和螺母的轮子）

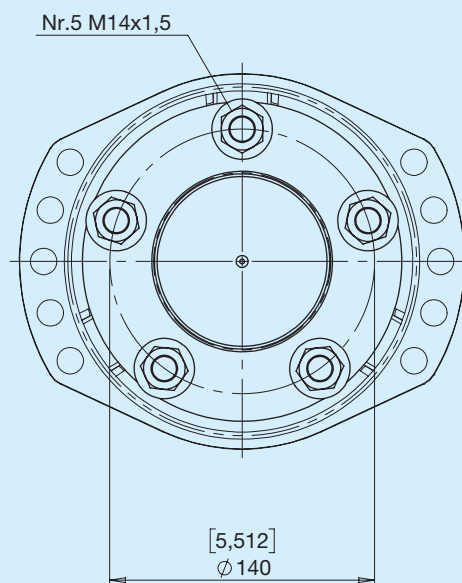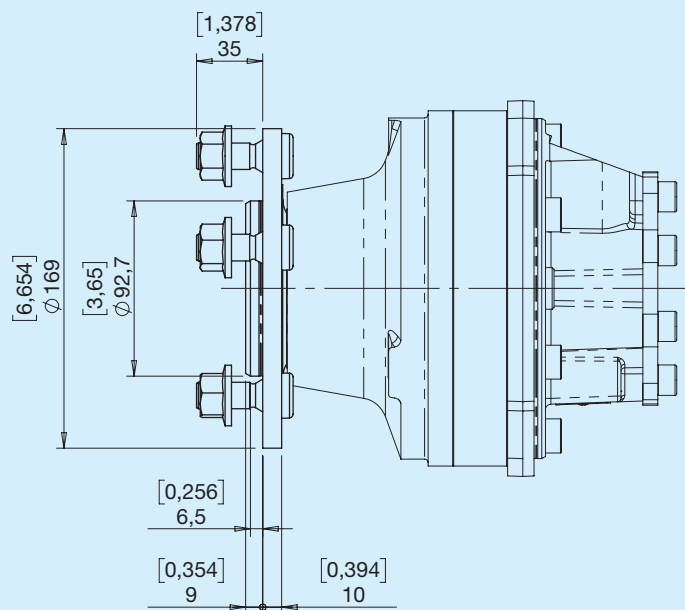


E 轴 DIN 5480 W50x2x30x24

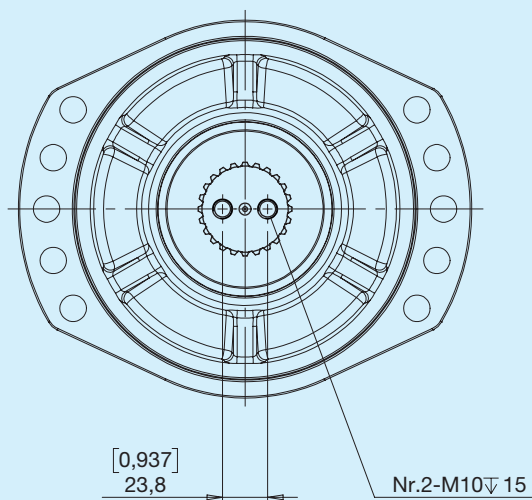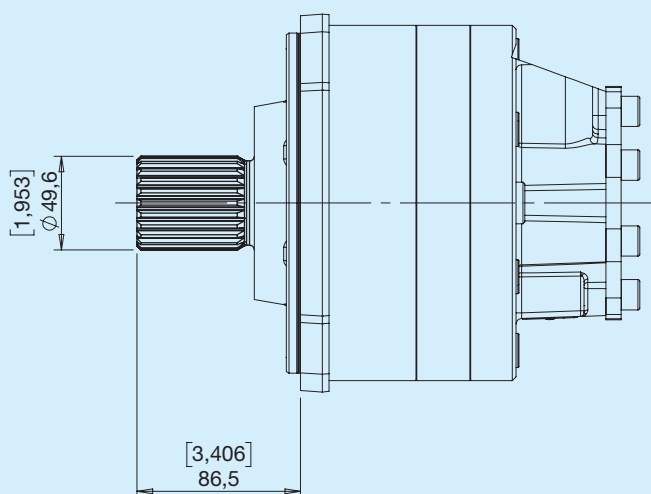


最大扭矩 2860 Nm

G 型

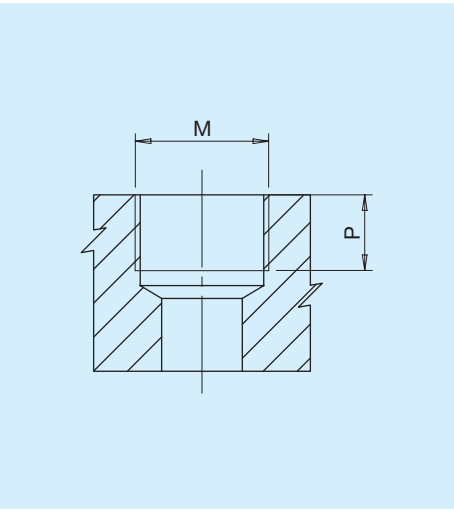

类型	M	Nm	P	
			mm	in
G2	端口 ISO 1179-1 - G 1/4	17	15	0.59
G3	端口 ISO 1179-1 - G 3/8	38	12.5	0.49
G4	端口 ISO 1179-1 - G 1/2	70	15	0.59

U 型

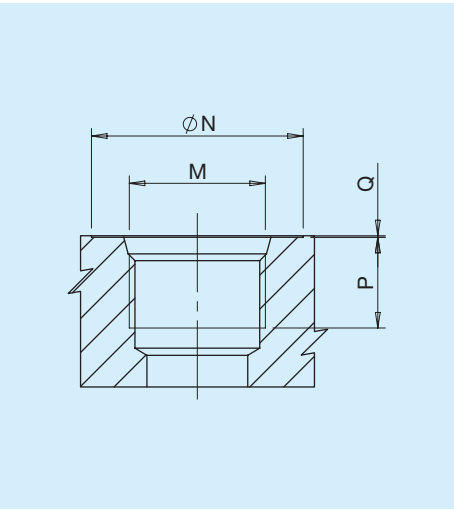


类型	尺寸	N		P		Q		M	Nm
		mm	in	mm	in	mm	in		
U2	1/4"	21	0.83	12	0.47	0.3	0.01	端口 ISO 11926-1 - 7/16-20	17
U3	3/8"	26	1.02	15	0.59	0.3	0.01	端口 ISO 11926-1 - 9/16-18	38
U4	1/2"	30	1.18	15	0.59	0.3	0.01	端口 ISO 11926-1 - 3/4-16	47


组合

类型	Input/Output A-B	排水 L1-L2	位移变化 Y	制动松开 X
G	G7	G3	G6	G2
U	U7	U3	U6	U2


FC 固定无制动

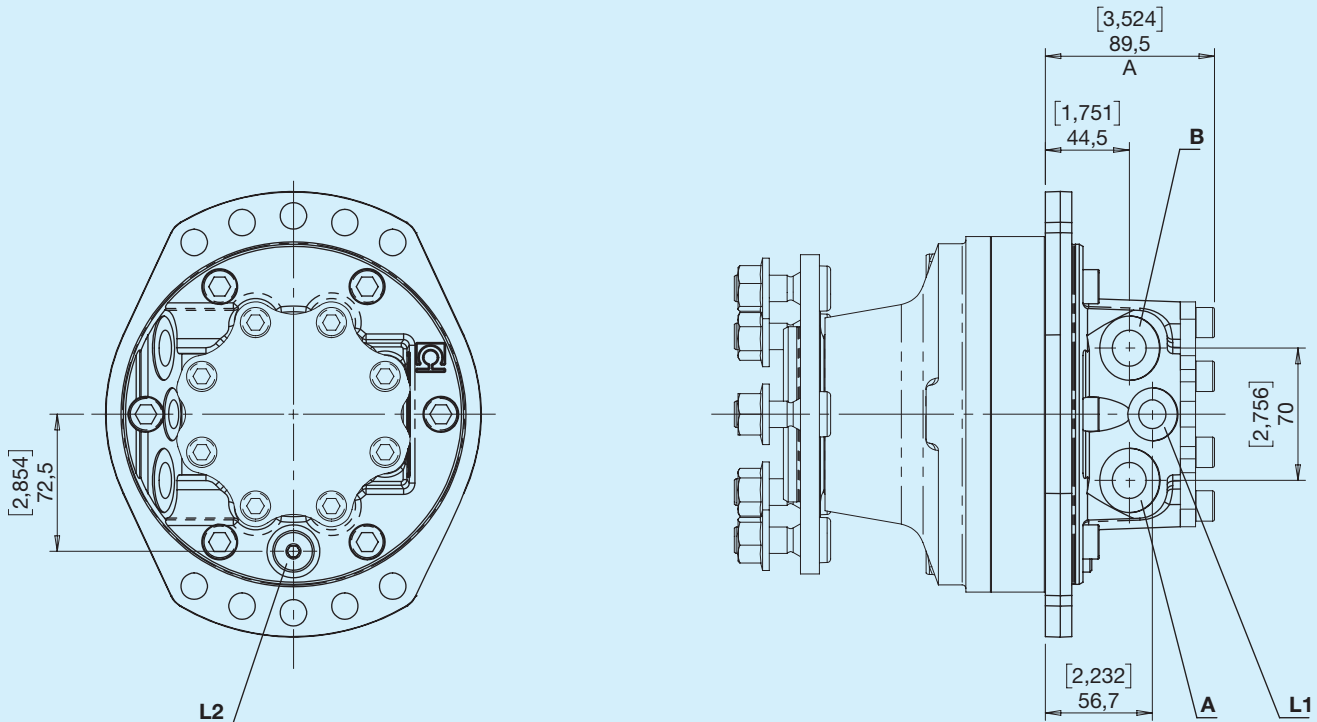


FF 固定带制动

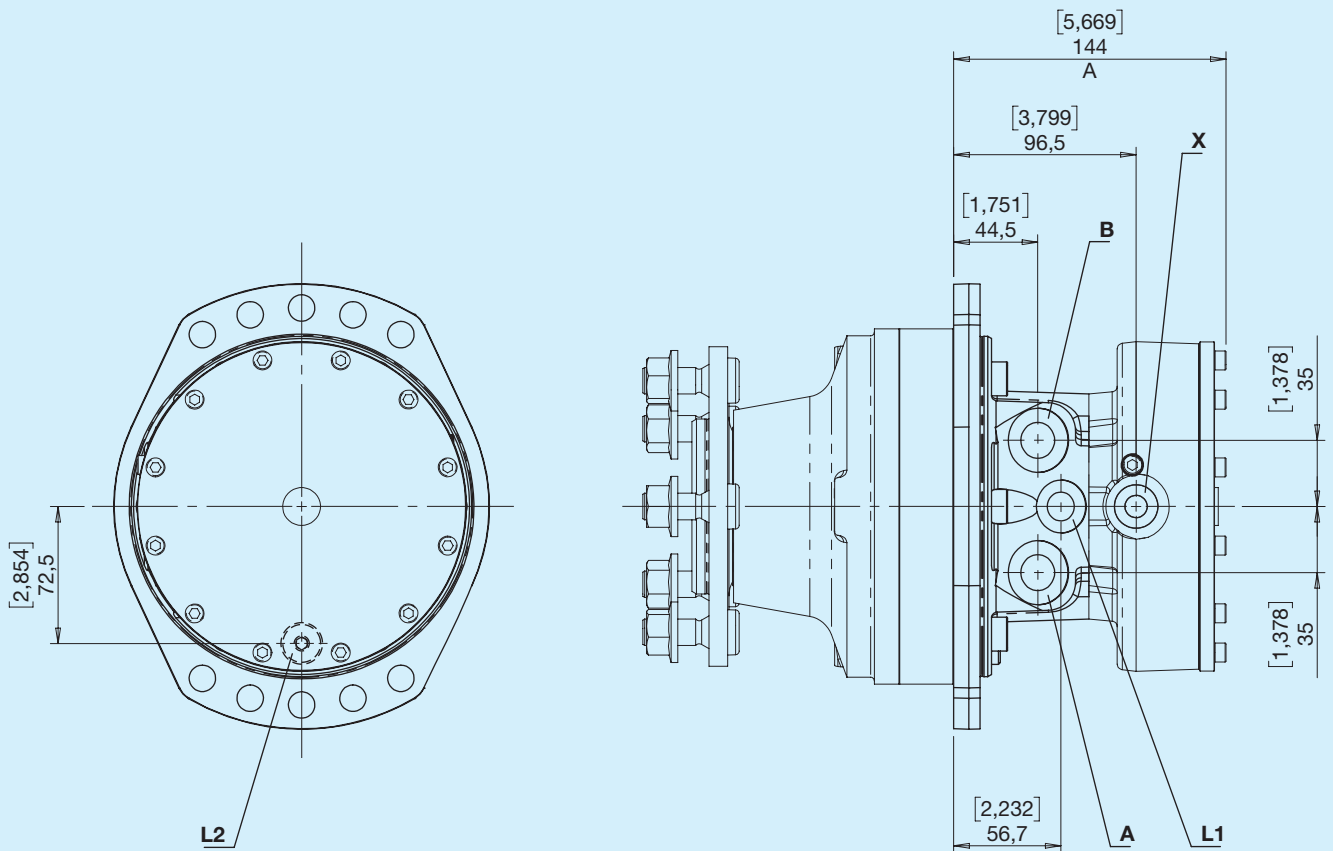


VC 2 档无制动

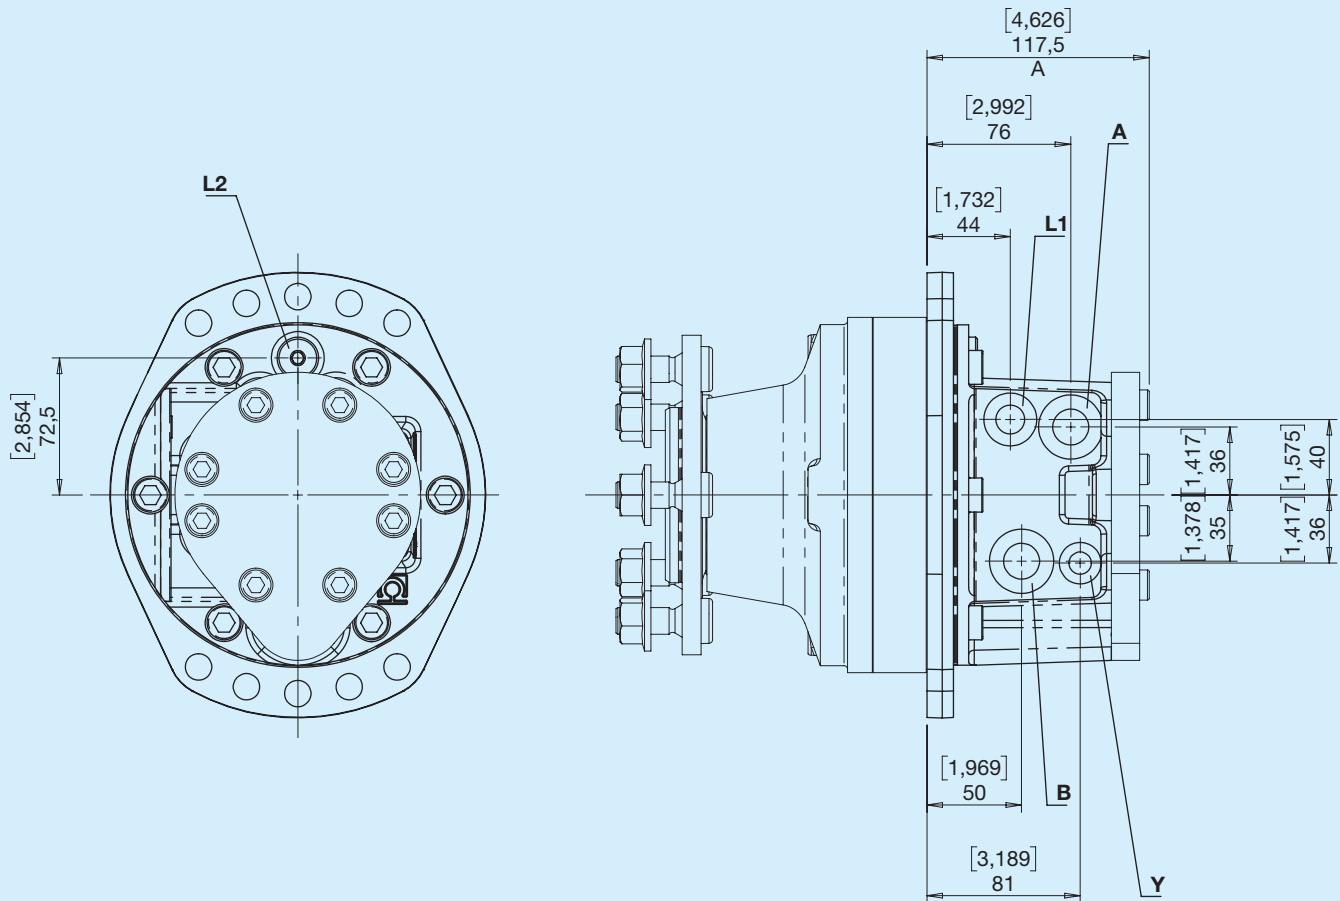



VF 2 档带制动

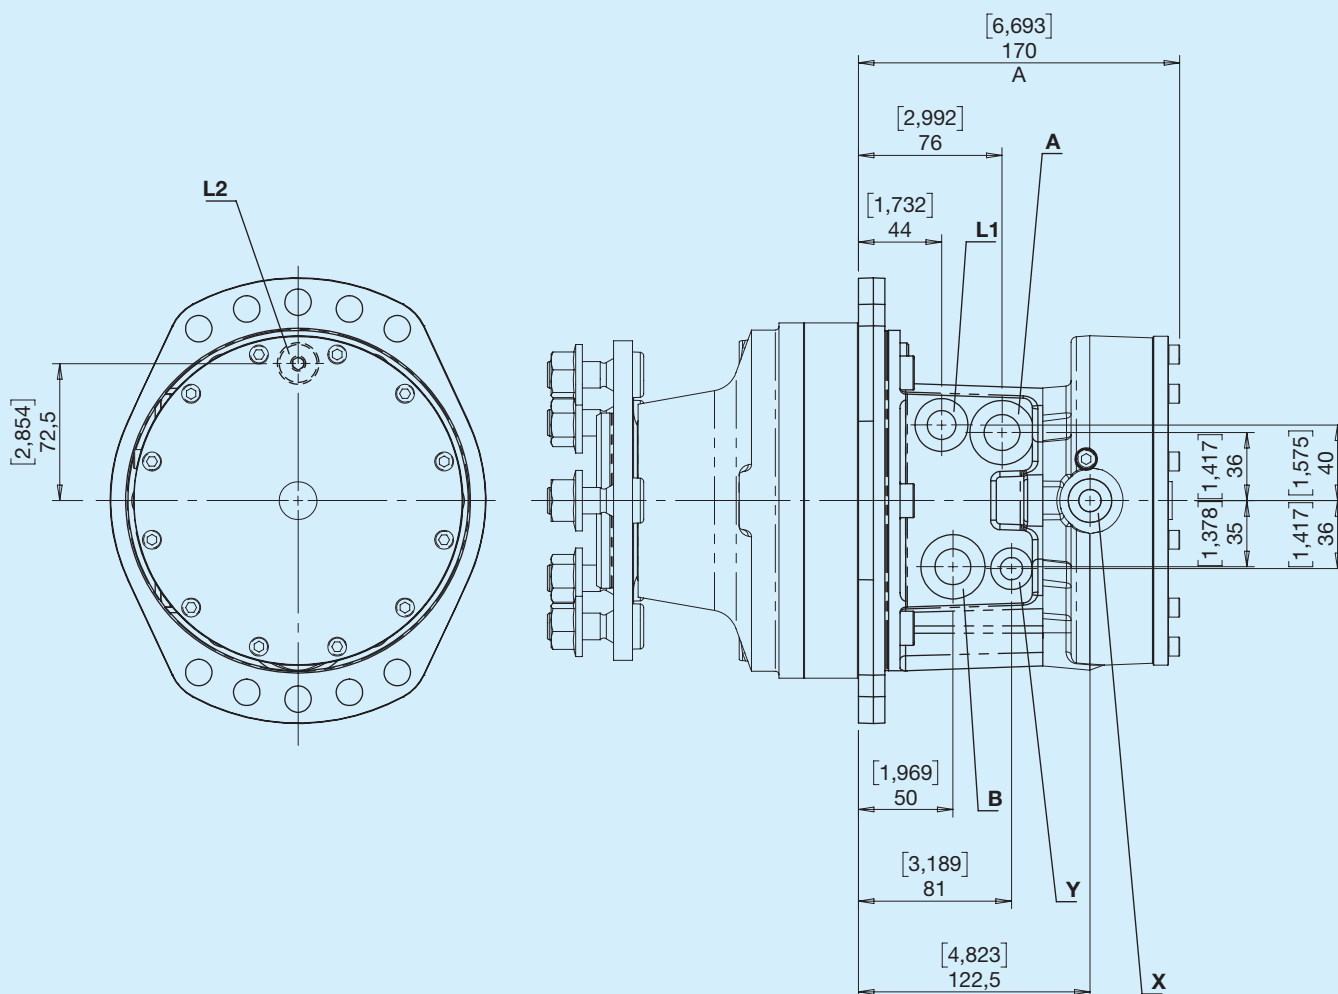


AC 固定无制动

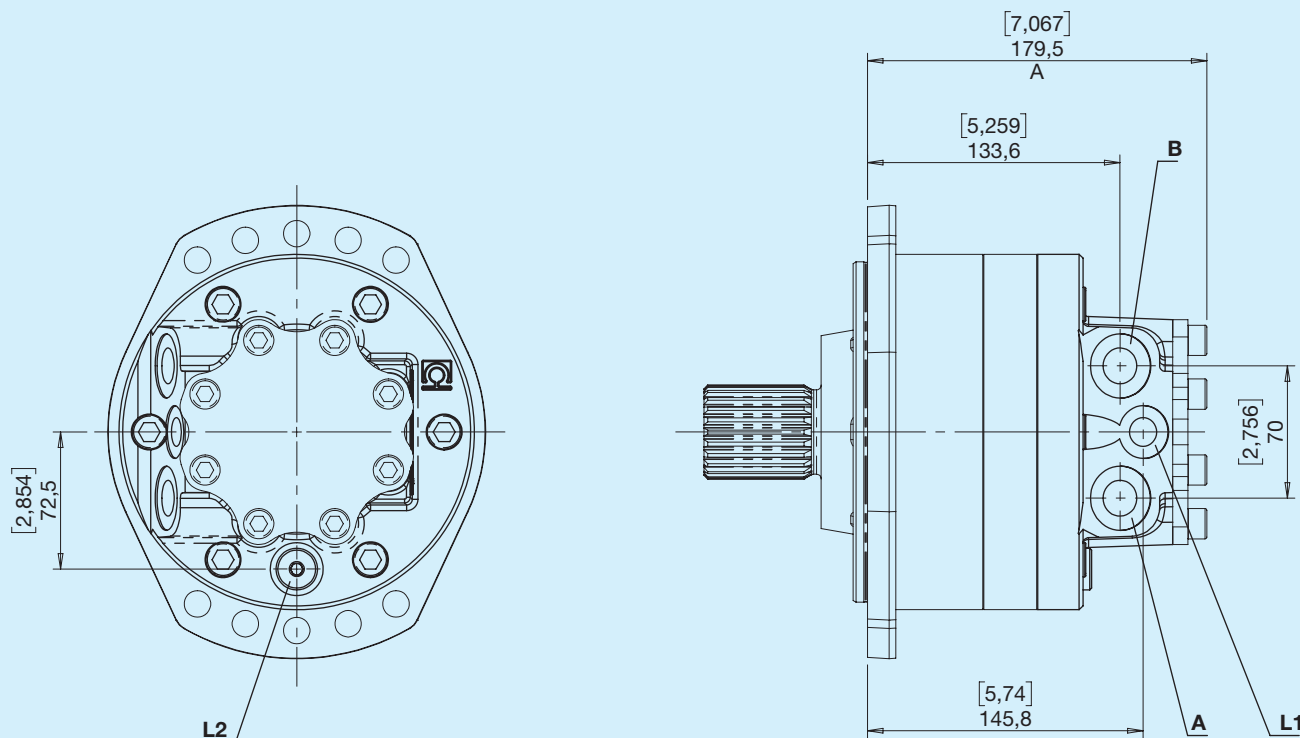

WC 2 档无制动

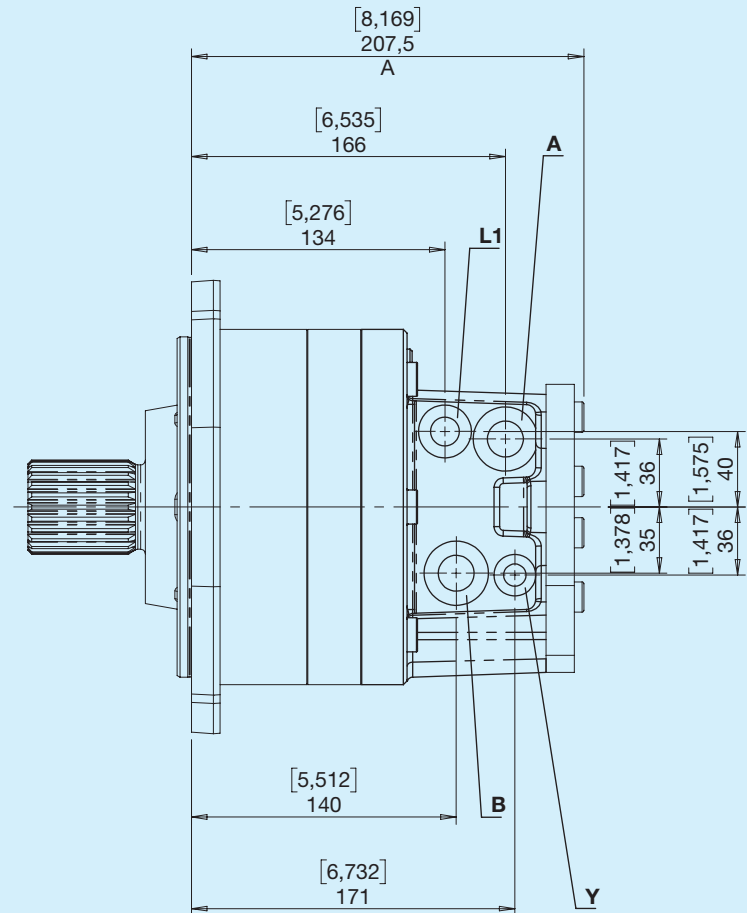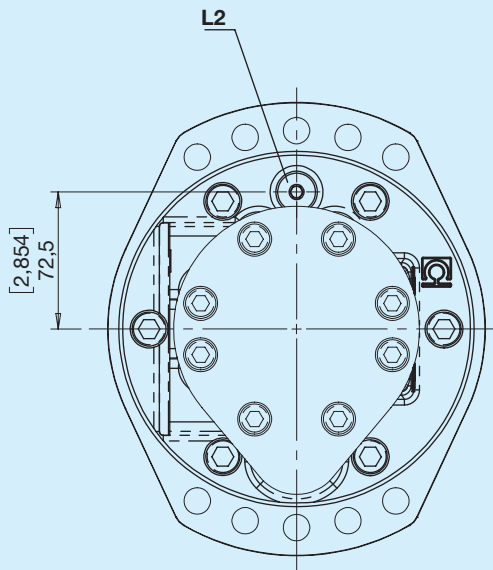

WF 2 档带制动

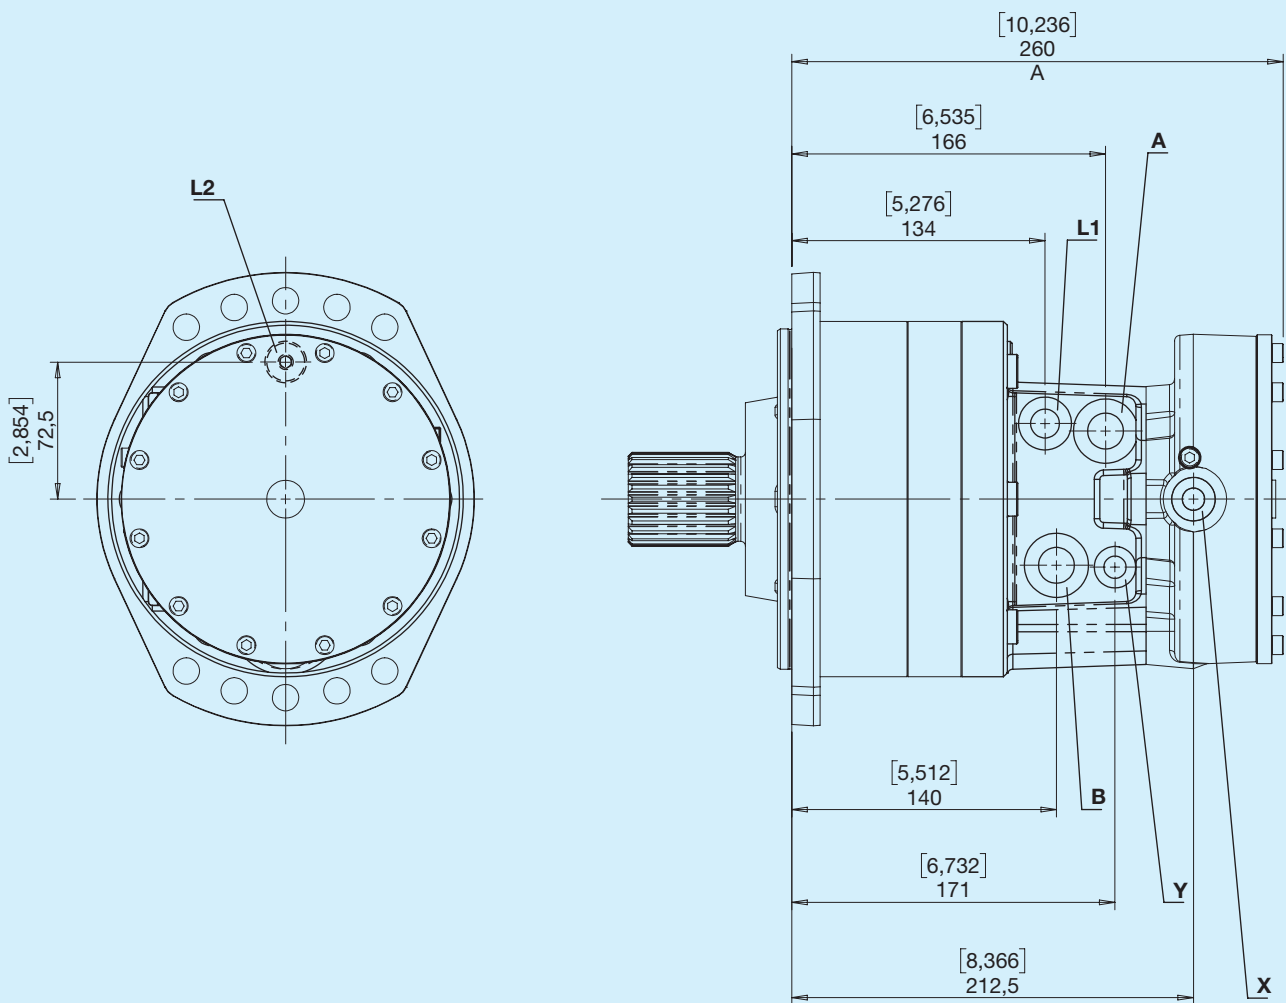

	1	2	3	4	5	6	7	8	9	10	11	12	13
HPR													
1	标准排量												
2													
2	传动轴												
3	FB 固定 - 双向 VR 可变 - 右 VR 可变 - 左												
4	最小排量												
5	210 260 360 230 330 400												
6													
7	法兰												
	R 后 (轮) 1 后 (带螺钉的轮子) 2 后 (带螺钉和螺母的轮子) E 轴 DIN 5480 W50x2x30x24												
8	传动轴												
	F 带制动 C 不带制动												
9	油口类型												
	G 气体 U 通用												
10	配件												
	0 无选项 C 油漆 V 冲洗阀 S 转速传感器												
11	特殊形式												
12	...												
13													