





HPR 系列 2 电机

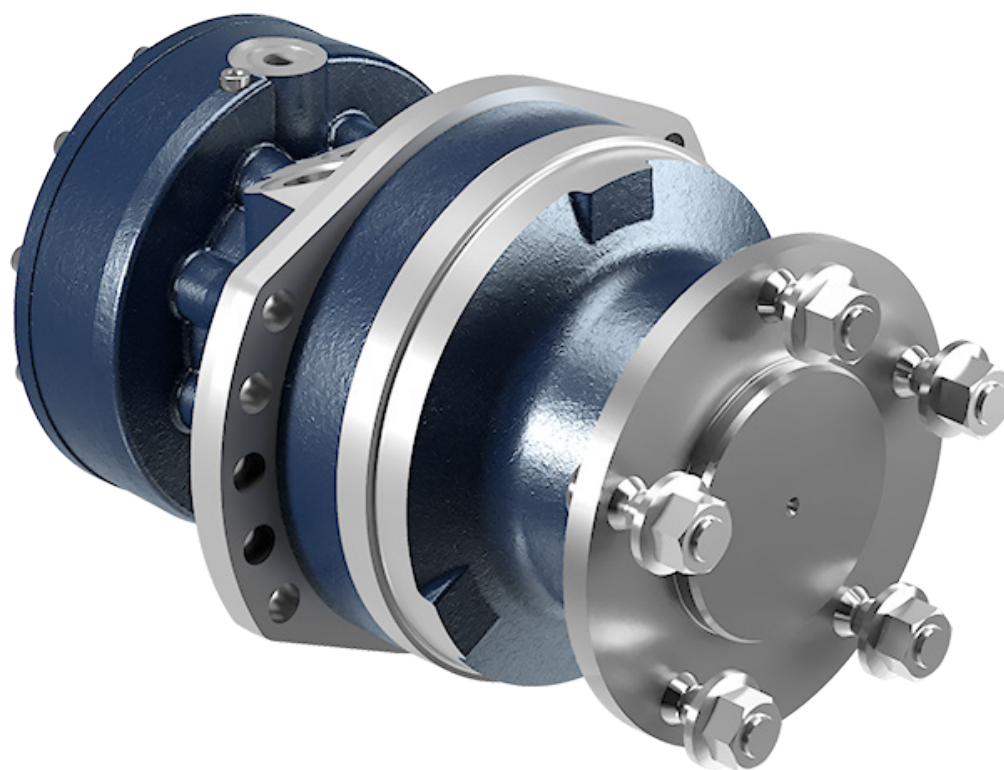


开始使用前，请仔细阅读文件《闭式轴向柱塞泵和电机使用一般说明》。

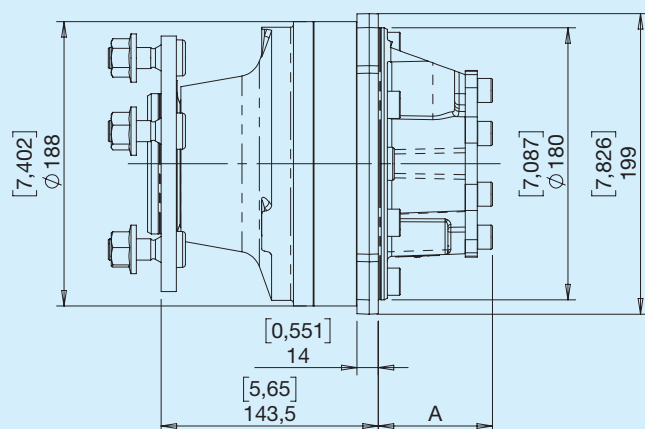

电动轮版本

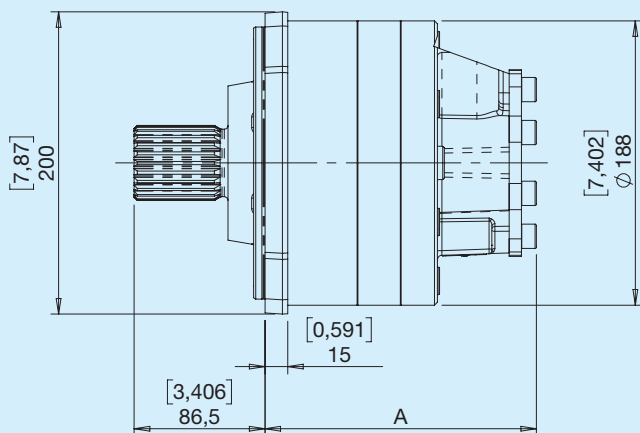
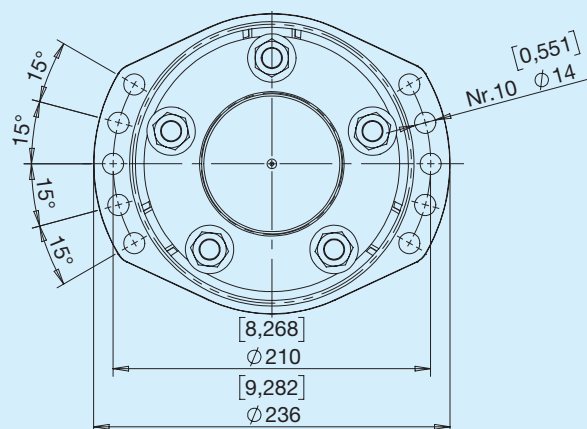


花键轴版本


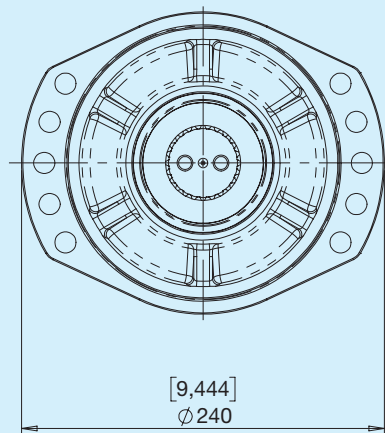


HPR2	理论位移				转速		工作压力		最大功率		Massa	
	固定 / 1 档		2 档		固定 / 1 档	2 档	psi		固定 / 1 档	2 档	kg	lbs
	cm ³	in ³	cm ³	in ³	RPM	RPM	5800	psi	kW	kW		
210	213	13,00	107	6,53	470	470	450	6525	18	12	33	73
230	235	14,34	118	7,20	435	435	450	6525	18	12	33	73
260	261	15,93	131	7,99	390	390	450	6525	18	12	33	73
330	333	20,32	167	10,19	265	336	400	5800	22	16	33	73
360	367	22,40	184	11,23	245	311	400	5800	22	16	33	73
400	408	24,90	204	12,45	220	279	400	5800	22	16	33	73


R 后 (轮)

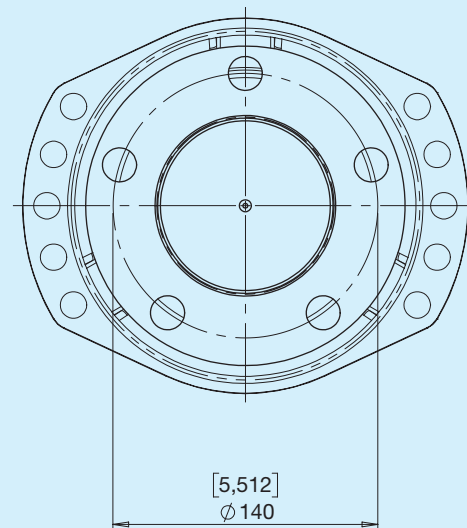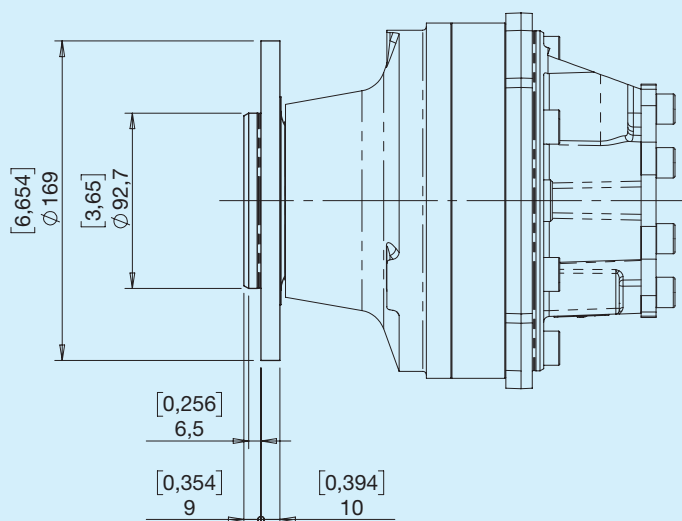


1 后 (带螺钉的轮子)

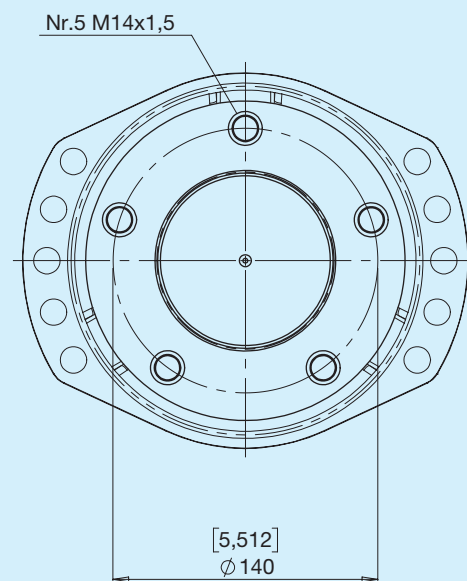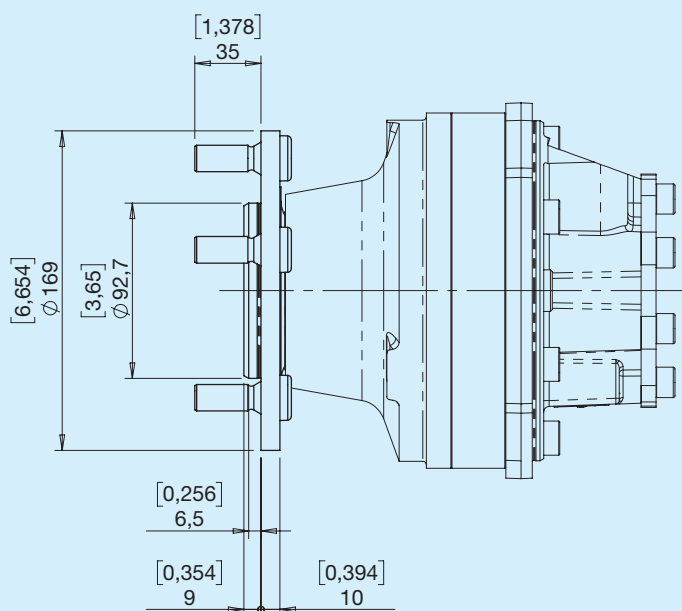

2 后 (带螺钉和螺母的轮子)

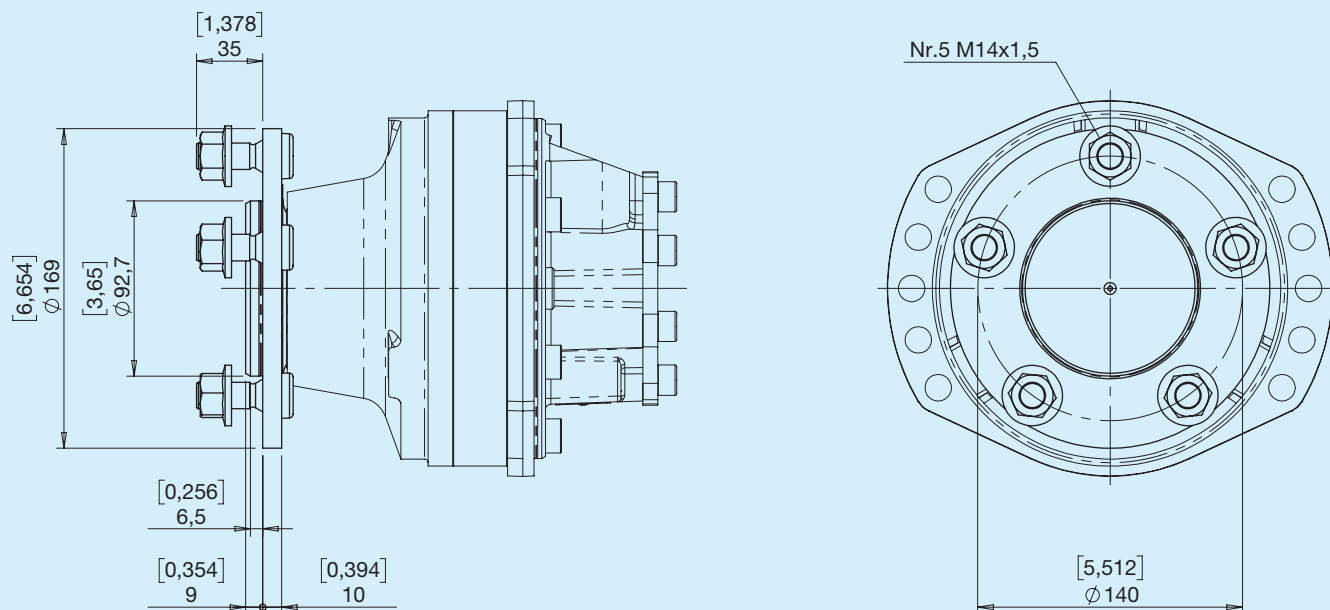


E 轴 DIN 5480 W50x2x30x24

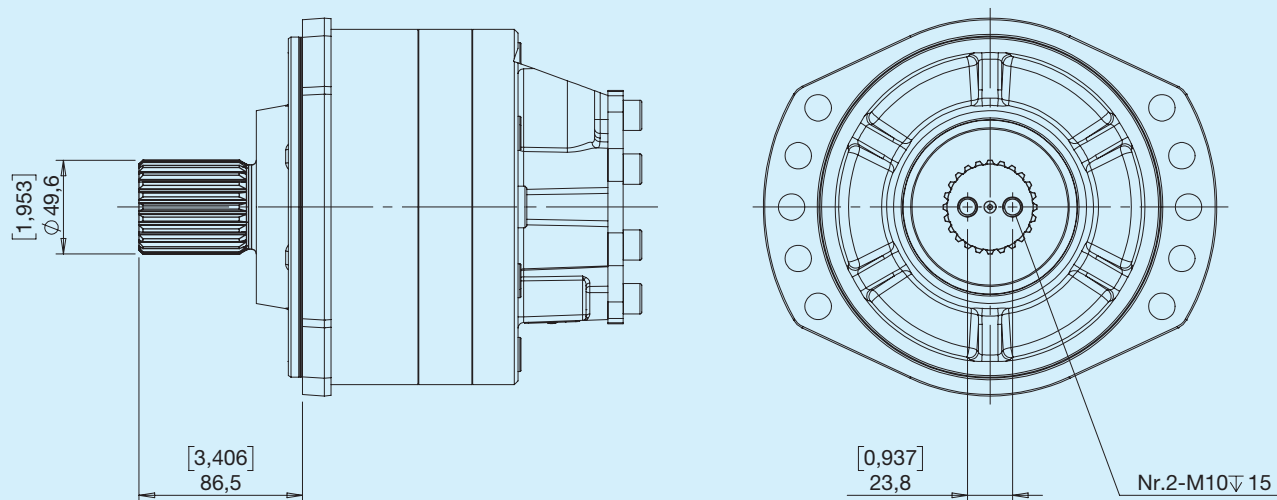


最大扭矩 2860 Nm

G 型

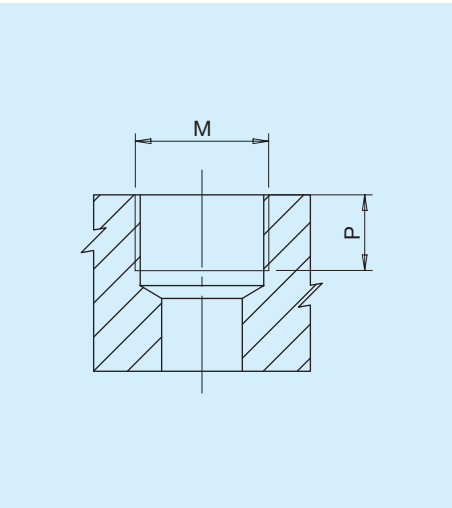

类型	M	Nm	P	
			mm	in
G2	端口 ISO 1179-1 - G 1/4	17	15	0.59
G3	端口 ISO 1179-1 - G 3/8	38	12.5	0.49
G4	端口 ISO 1179-1 - G 1/2	70	15	0.59

U 型

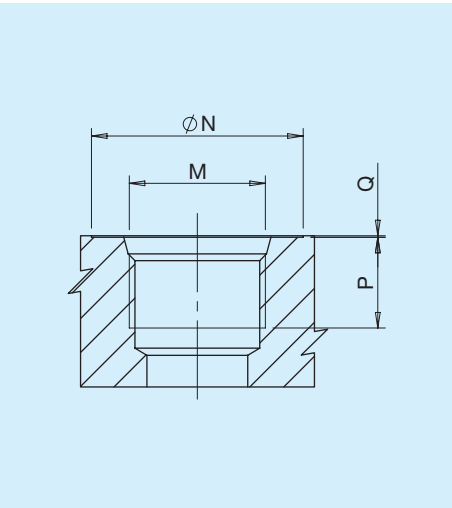


类型	尺寸	N		P		Q		M	Nm
		mm	in	mm	in	mm	in		
U3	3/8"	26	1,02	15	0,59	0,3	0,01	端口 ISO 11926-1 - 9/16-18	38
U4	1/2"	30	1,18	15	0,59	0,3	0,01	端口 ISO 11926-1 - 3/4-16	47
U5	5/8"	34	1,34	15	0,59	0,3	0,01	端口 ISO 11926-1 - 7/8-14	70


组合

类型	Input/Output A-B	排水 L1-L2	位移变化 Y	制动松开 X
G	G4	G3	G2	G2
U	U5	U4	U3	U3


FC 固定无制动

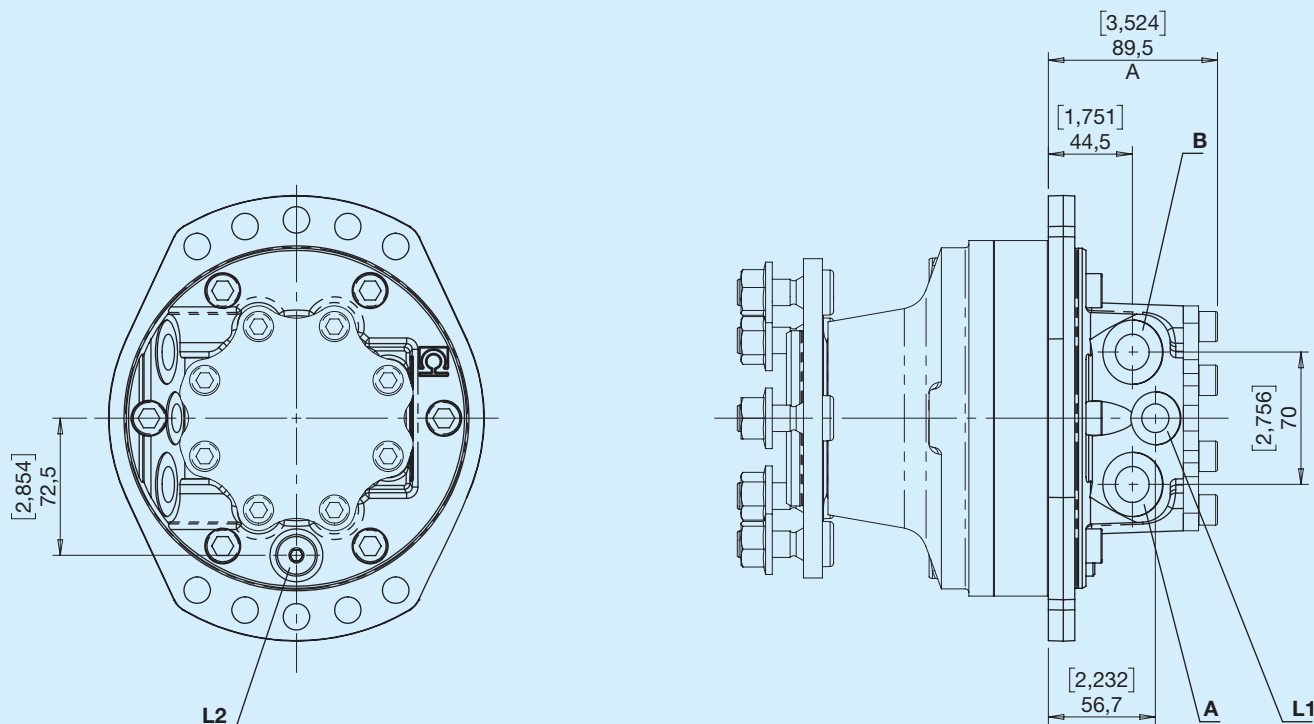


FF 固定帶制動

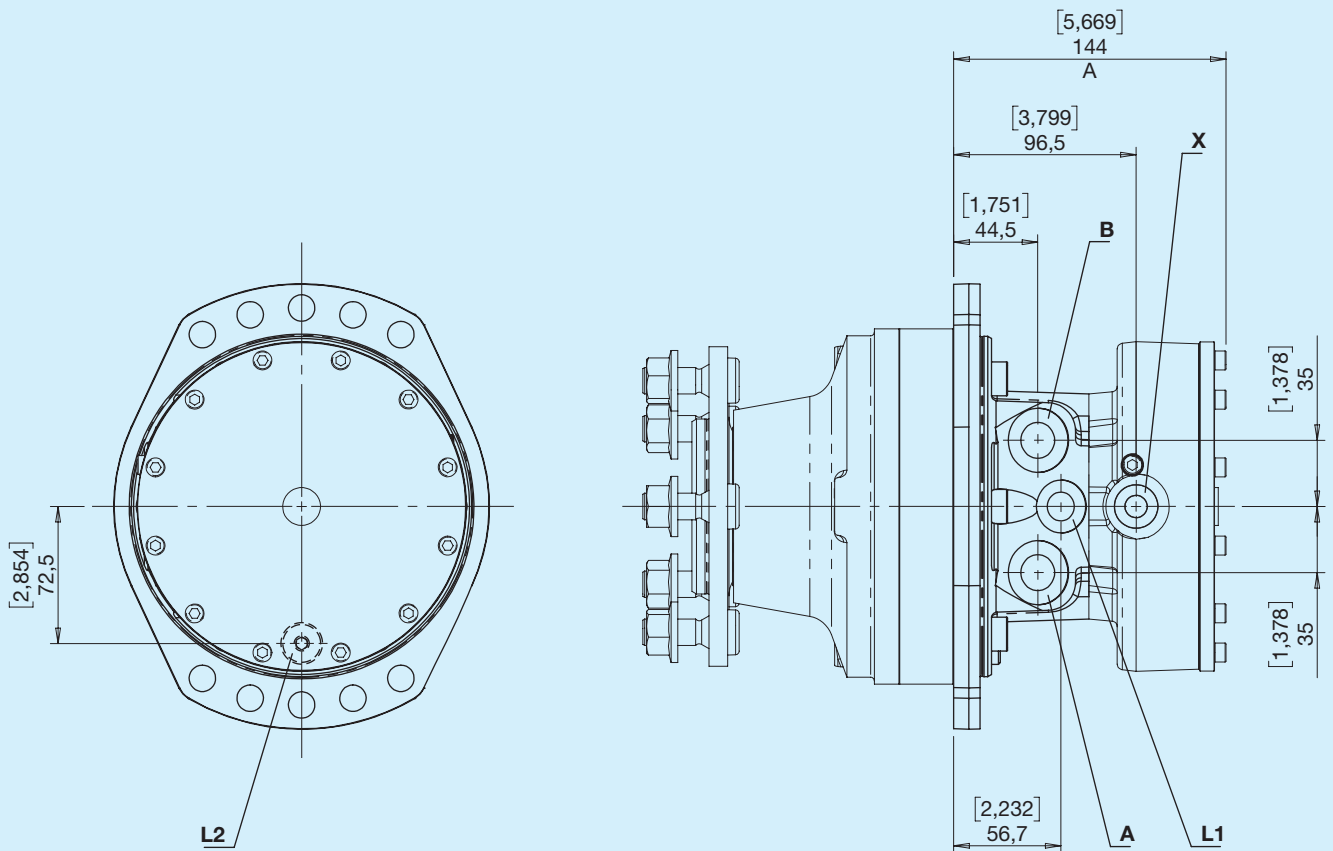


VC 2 档无制动

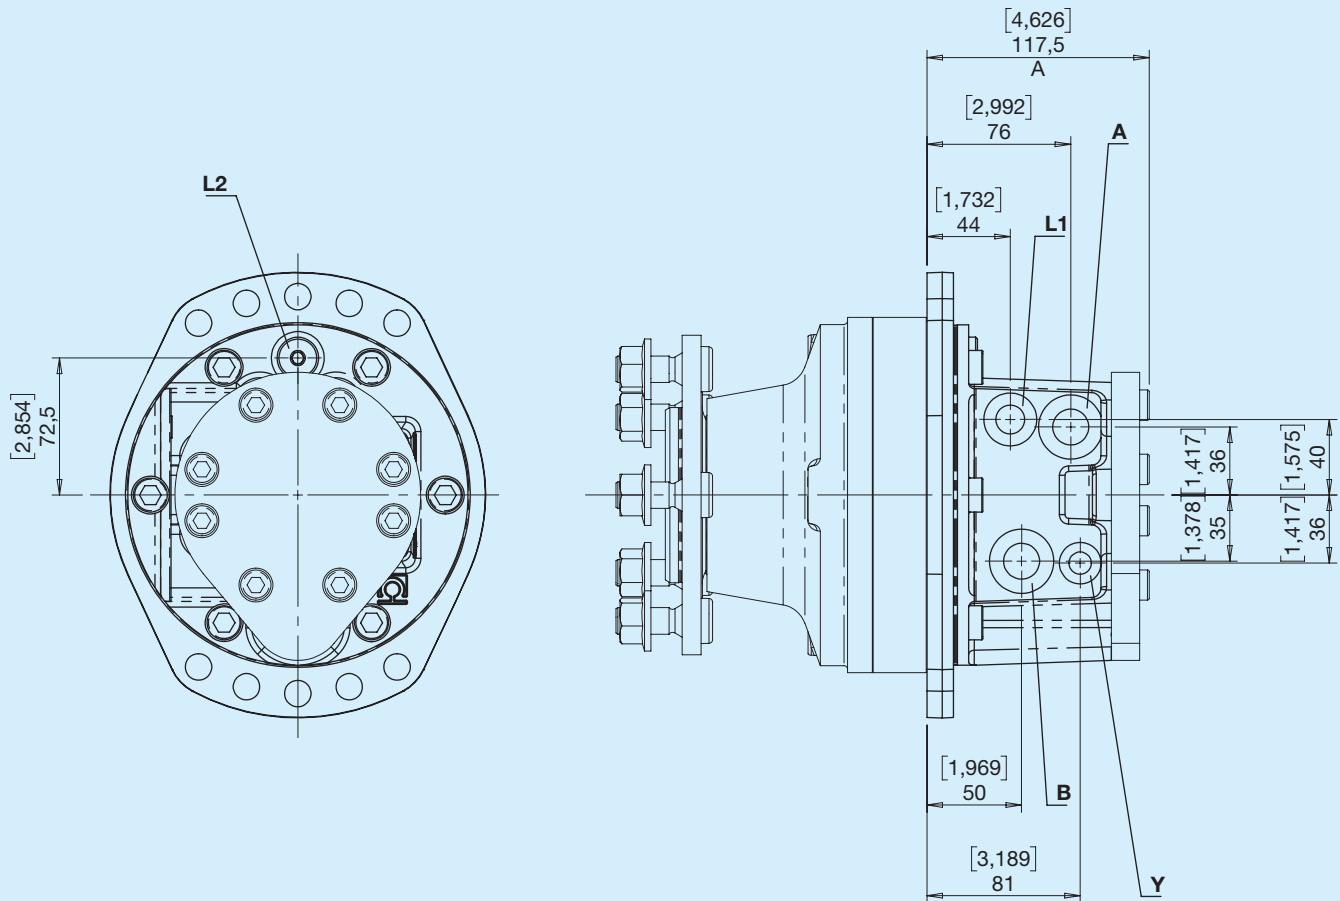



VF 2 档带制动

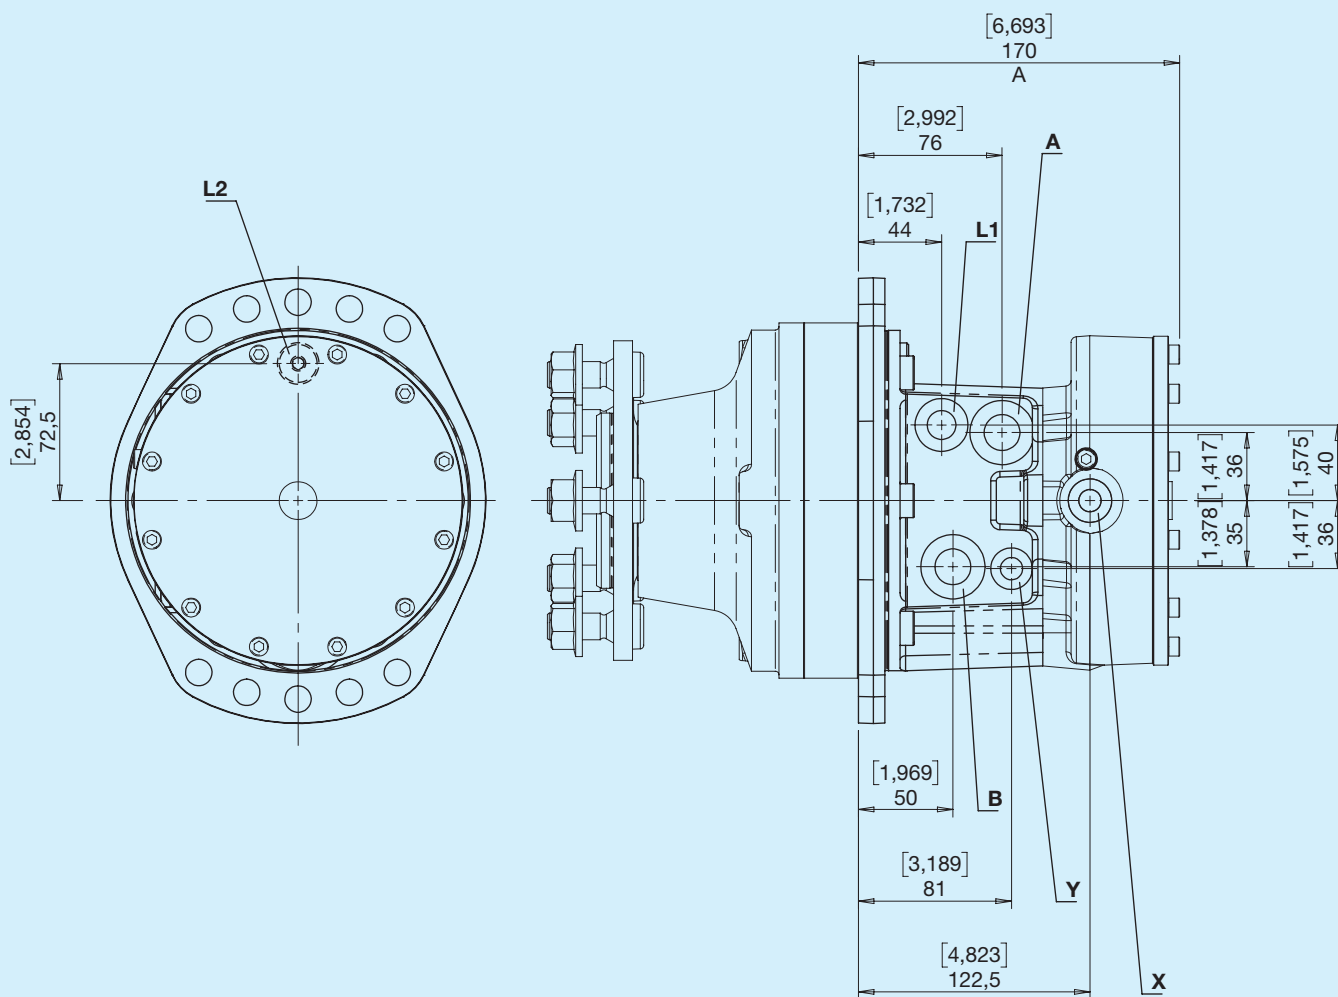


AC 固定无制动

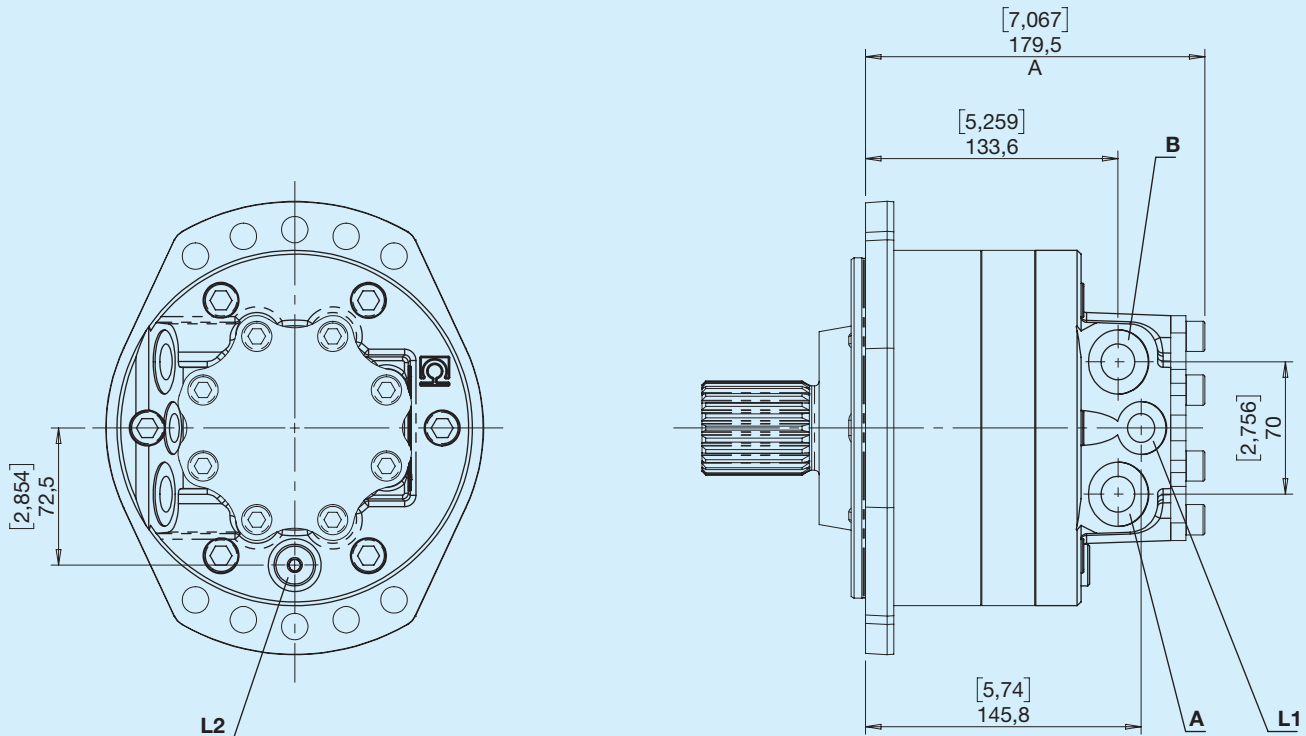



WC 2 档无制动

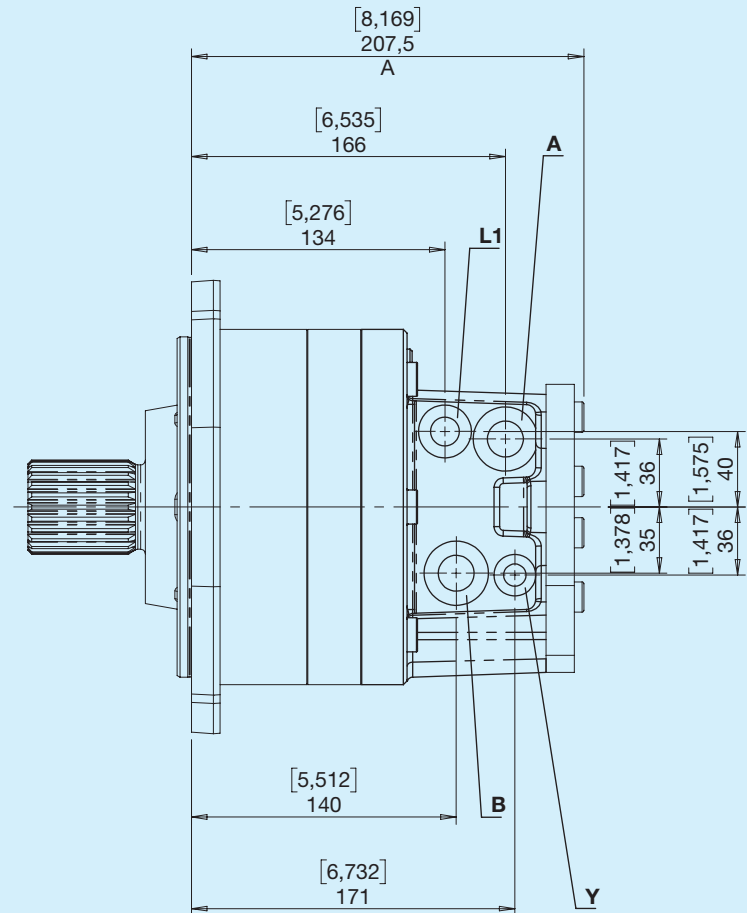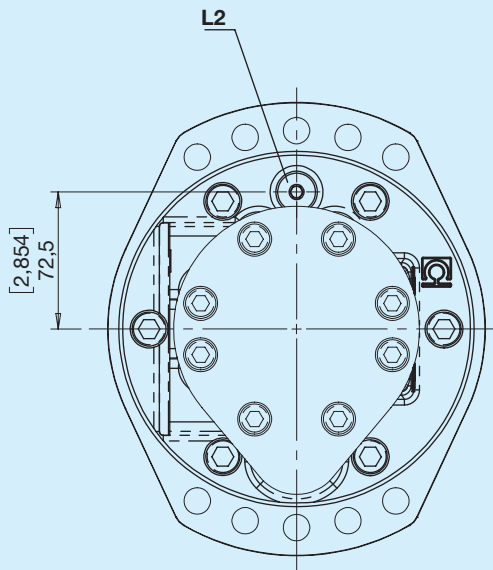


WF 2 档带制动

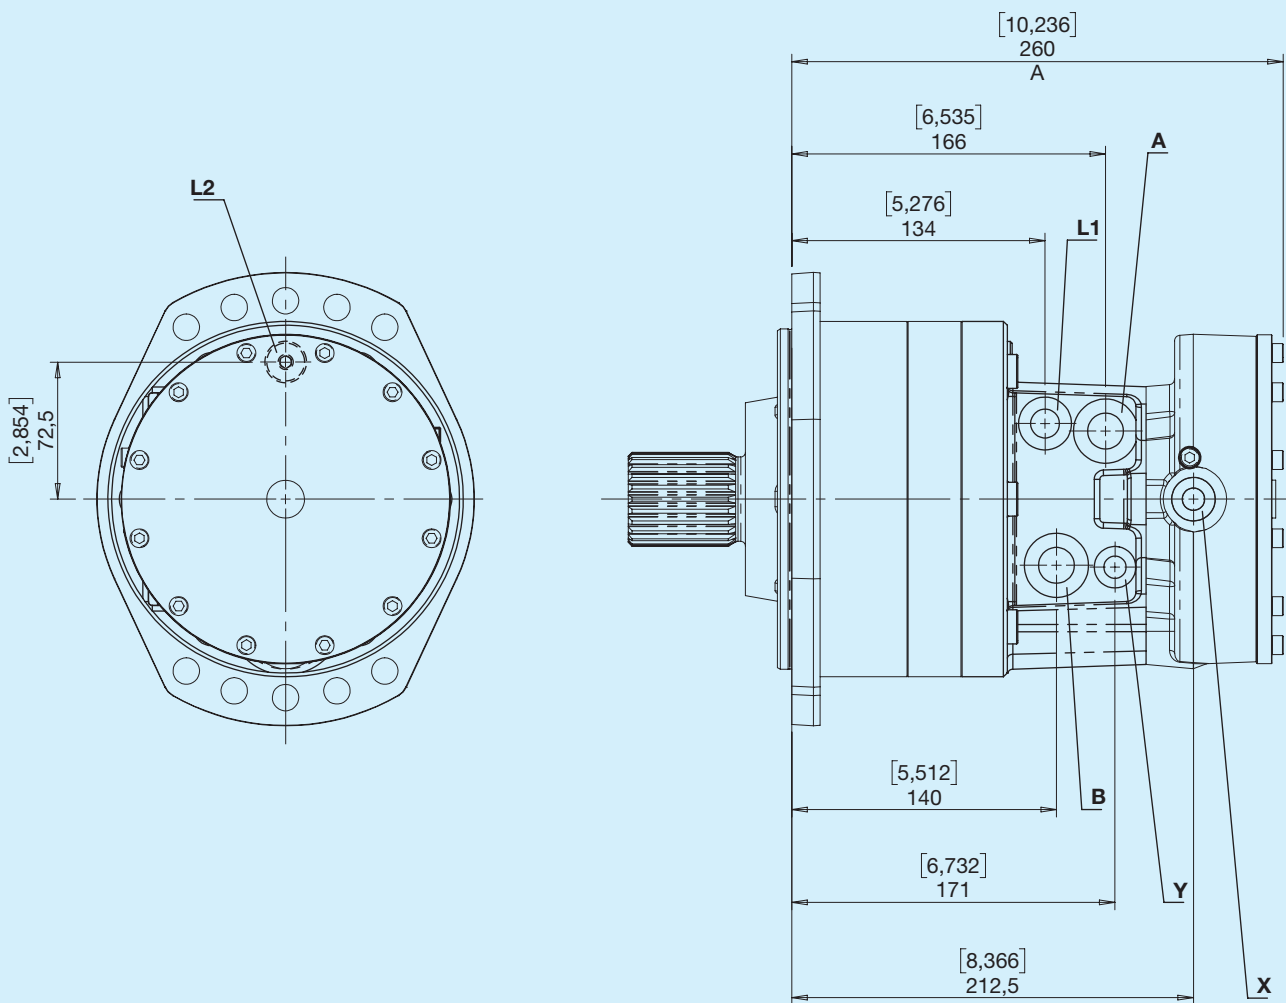

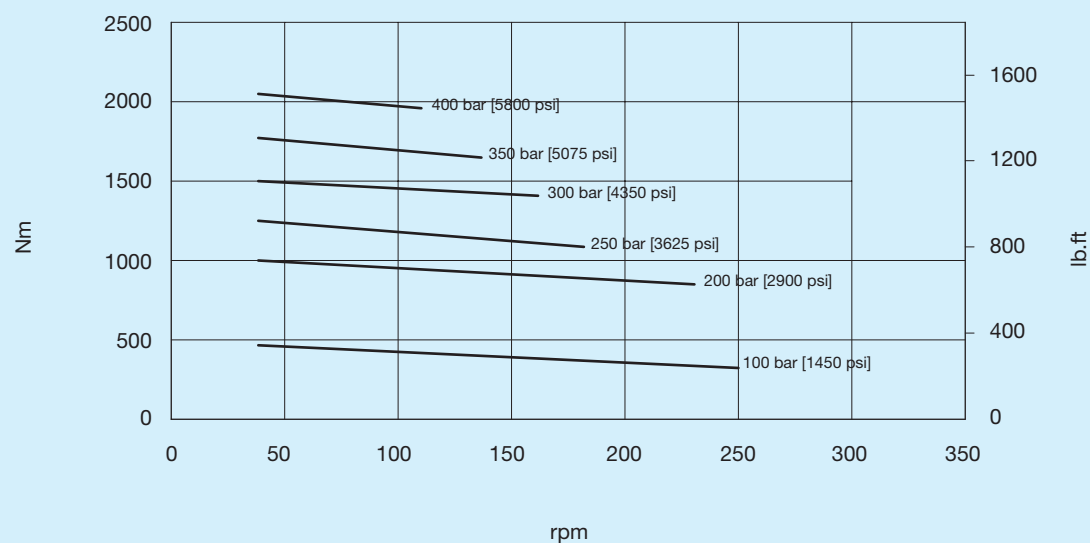

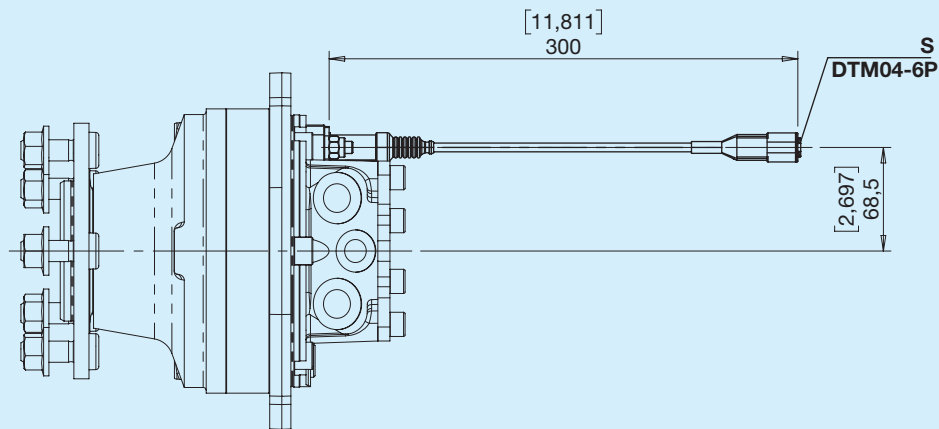S Sensore di giri

轮毂电机版本

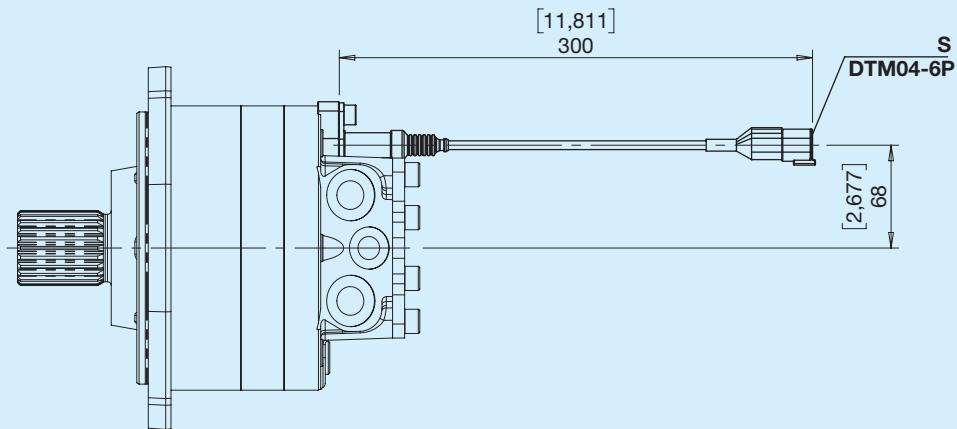


花键轴版本


特性

输出通道数量: **2**
 输出类型: 见图示
 供电电压范围: **4.5Vdc ~ 30Vdc**
 带负载时的最大输出电流: **700mA**
 可读的最高频率: **10kHz**
 可读的最低频率: 零速
 传感器本体工作温度范围: **-40°C ~ +125°C**
 传感器线缆工作温度范围: **-40°C ~ +105°C**
 传感器本体防护等级: **IP69K**
 连接器侧防护等级: **IP67**

输出信号

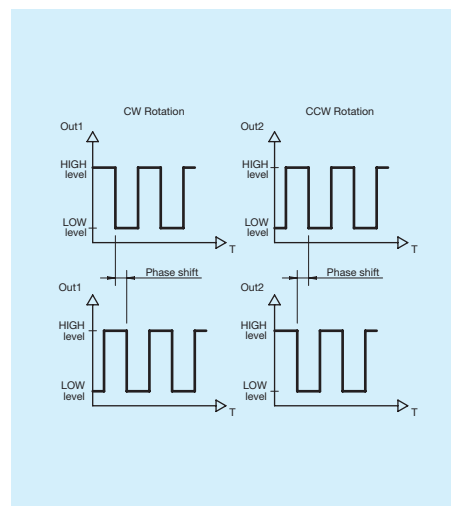

液压原理图

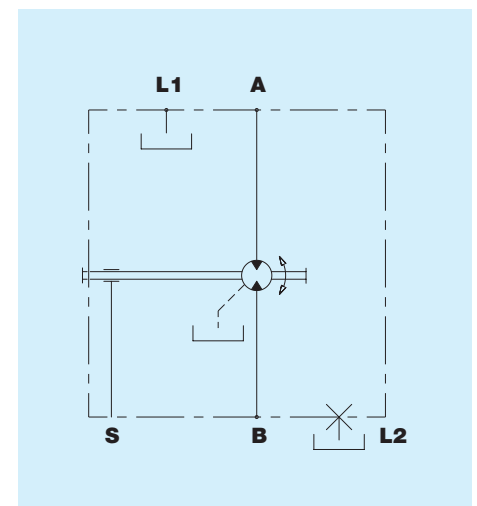

1	2	3	4	5	6	7	8	9	10	11	12	13
HPR2 1 2 3 4 5 6 7 8 9 10 11 12 13												
1 标准排量 2												
2 3 传动轴 FB 固定 - 双向 VR 可变 - 右 VR 可变 - 左												
4 5 6 最小排量 210 230 260 330 360 400												
7 法兰 R 后 (轮) 1 后 (带螺钉的轮子) 2 后 (带螺钉和螺母的轮子) E 轴 DIN 5480 W50x2x30x24												
8 传动轴 F 带制动 C 不带制动												
9 油口类型 G 气体 U 通用												
10 配件 0 无选项 C 油漆 S 转速传感器												
11 12 13 特殊形式 ...												